



Detailed cut-sheets of these Apprentice II accessories are available at www.ilc-usa.com


Relays

Softcross Relay: Single pole electrically held 120/277VAC 20 amp relay. Features zero-cross switching for endurance and reliability. Relays are available in normally open or closed.

Order: SRI-_ (NO, NC)

2 Pole Relay: Provides 2 pole 20 Amp control from a single space in the panel. Normally open contacts configuration.


Order: 2PR



Switch Input

Input Module: Provides 4 hardwired inputs that accept 3 or 4 wire momentary or maintained contacts. Also provides pilot outputs for each input.

Order: AP4I



Add-on Modules

Serial Interface: Add-on modules are available to communicate with BAS systems allowing status and control. Modules install directly onto the controller board in each panel.

Order: BACnet = BC-_ (BACnet IP = IP, BACnet MSTP= MSTP);
LonWorks = LON; Modbus = MB; Metasys N2 = N2

Telephone DTMF: Provides voice prompted control and status with a touchtone telephone.

Order: TI

Telephone Modem: Provides the ability to program and monitor over a telephone line.


Order: MD

DMX512 interface: Provides direct control of relays using DMX512 serial control signals.

Order: MX

TCP/IP interface: Provides the ability to program and monitor over a LAN or WAN using TCP/IP.

Order: IP

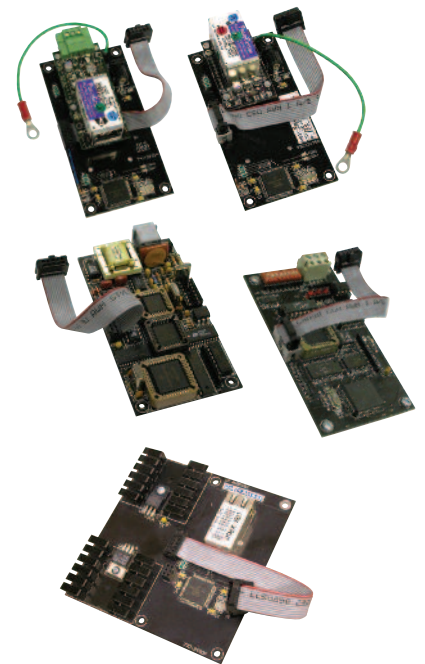

Enclosure

Trim Rings: Matching trim ring for flush mounting panels.

Order: FT-_ (size 04, 08, 16)

