




LIGHTSync Conditional

Input Module

- Provides enhanced conditional hardwired inputs
- Installs directly onto output board or remotely
- 8 inputs per module
- Made in the USA
- Easy non-screw push-to-connect terminals
- Optically isolated inputs protect electronics
- Accepts dry contact closures or optional 12-24VDC signals
- LED pilot input closure status

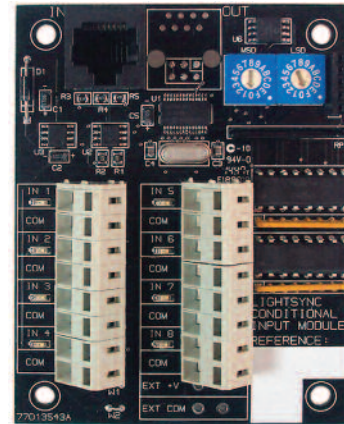

Add-Ons

Overview

The LightSync Conditional Input Module is designed to accept up to 8 hardwired switch inputs. Each input can be programmed with conditionals related to inputs and pilots in the module. You can setup "AND"/"OR" logic schemes for each input that needs to be true to activate the switch input. This is very useful in certain situations where you want an input active only when certain conditions exist. Any input can be programmed to control any relay(s), group(s), or preset(s) in any or all panels. Each input has an associated pilot status LED that activates when the input is closed. Inputs have a time-of-day or open/close time of action which could disable the input or change the relays controlled.


Features

General Information:

- **8 conditional inputs** per module
- **Conditional input module** enhances current LightLEEDer conditionals
- **Made in the USA**
- **Installs** directly onto the output board
- **Digitally addressable** device for a unique address
- **Remote mounting** option for LightSync network
- **RJ45 connectors** for remote mounting module
- **Connectors** are an easy non-screw push-to-connect type
- **Optically isolated** inputs to protect the electronics
- **Accepts** dry contact closures or open collector inputs
- **Optional** module for 12 - 24 VDC signals
- **Accepts 2 wire** momentary or maintained switch closures
- **Switch closure LED** status is provided for each input
- **Software** logic programming



Physical

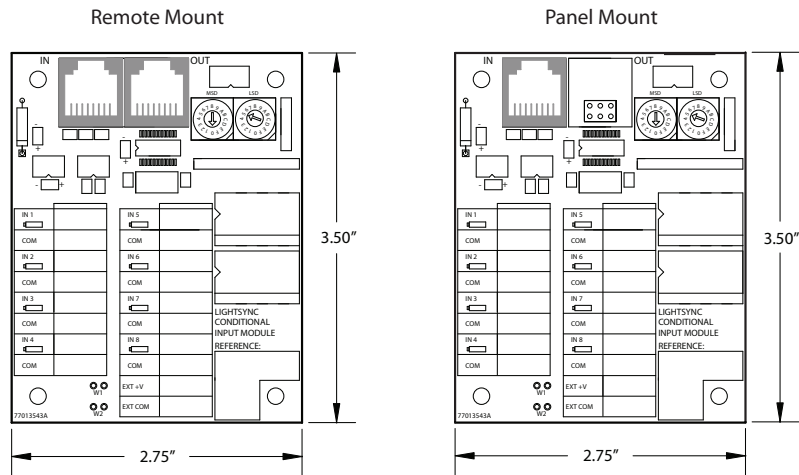

Specifications

Remote Mounting Option:

- Remote mount anywhere on the local LightSync network
- Self powered from the network
- RJ45 connectors provided for easy connection
- Mounting plate available

Safeguards:

- Optically isolated inputs eliminate issues connecting systems together

Physical:

- 2.75" Wide 3.50" High
- Easy non-screw push-to-connect terminals
- Digital addressing switches
- Status LED for each input

Electrical:

- Powered from the panel or from the LightSync network

Operating Environment:

- Location: Interior space
- Operating Temperature: 0° to 50° C
- Humidity: 10% - 90% Non-condensing
- Atmosphere: Non-explosive/corrosive
- Vibration: Stationary

Certifications and Approvals:

- UL CUL
- FCC Part 15

Ordering

