



LIGHT *Sync* Key Switch

Data Line
Key Switch

- Data line key switch station
- Made in the USA
- Momentary or maintained switches
- Architectural design with matching screwless cover
- Status indicators for true relay, group or preset status
- Mounts in a standard single gang electrical box
- Engraved button identification available
- Hardwired version available



Standard cover

Overview

The LightSync data line key switch provides an extra level of security and limits access to only those who possess the key. Switch stations have a high quality 5-tumbler key switch and status LED. Key switches may be programmed to control any relay(s), group(s) or preset(s) throughout the network. Switch faceplates are available in four colors, stainless steel, and brushed aluminum and are supplied with matching Decora® switch plates.

Features


- **Data line** key switch station
- **Made** in the USA
- **Switches** supplied with momentary or maintained closures
- **Secure** 5-tumbler high quality switches
- **Program** to control to control any relay(s), group(s) or preset(s)
- **Status LEDs** for indicating the true state of a relay, group or preset
- **Faceplates** are available in white, ivory, gray, black, stainless steel and brushed aluminum
- **Mounts** in a standard single gang box
- **Engraving** is available for switch identification
- **Remote mount** anywhere on the LightSync network
- **Self powered** from the network
- **RJ45 connectors** provided for easy connection
- **Addressable** rotary switches
- **Decora®** style matching switch plate provided
- **Hardwired** version available



LIGHT *Sync* Key Switch

Data Line
Key Switch

Physical

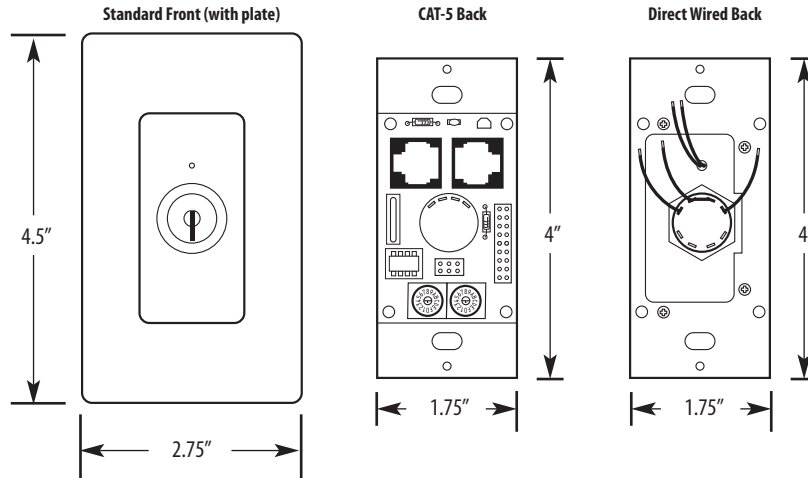

Specifications

Physical:

- Standard single gang mounting
- Digital addressing switches
- RJ45 connectors provided for easy connection
- Screw or screwless plates are available
- Mounting screws provided
- Laser engraving up to 10 characters provided
- Available in ivory, white, black, gray, stainless steel and brushed aluminum

Switches:

- Momentary SPDT
- Maintained SPDT (on-off-on) key removable in "on" position (Version A)
- Maintained SPDT (on-off-on) key removable in "off" position (Version B)

Switch Plates:

- Lexan® (screwless)
- Brushed Aluminum (visible screws)
- Stainless Steel (screwless/visible screws)
- Painted (visible screws)

Electrical:

- Powered from the panel or LightSync network

Operating Environment:

- Location: Interior space
- Operating Temp.: 0° to 50° C
- Humidity: 10% - 90% Non-condensing
- Atmosphere: Non-explosive/corrosive
- Vibration: Stationary

Certifications and Approvals:

- FCC Part 15

Ordering

