


# CONFERENCE ROOM IECC 2015 DESIGN GUIDE

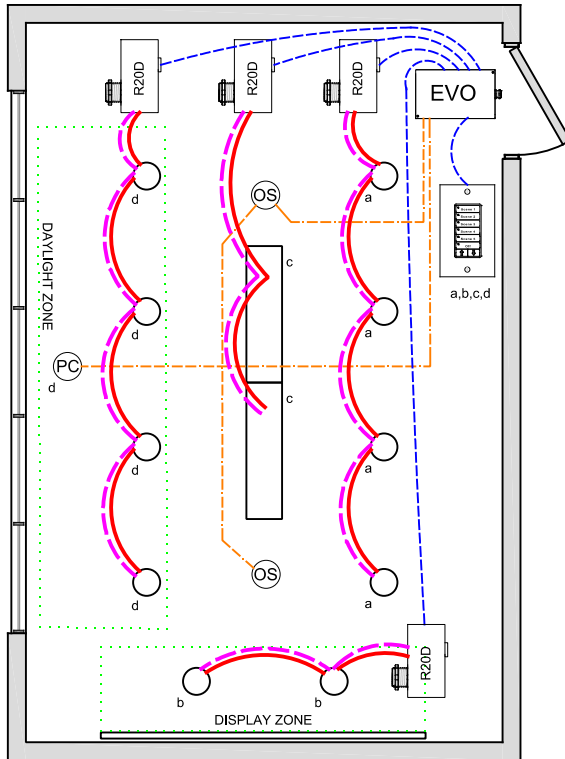

## OVERVIEW:

Lighting zones are controlled together or individually with 0-10V dimming, programmable max/min levels, vacancy off, local digital control stations.

## SEQUENCE OF OPERATION:

Lights turn on at digital switch station. Occupancy sensor input set for vacancy-off control, can be changed to on/off with adjustable dim level per zone. Dimmer outputs provide smooth full range control, zones can be set for adjustable start level from occupancy or digital switch. Digital scene switch station provides recall and capture of scenes and dimming, plus dimming for all zones as one. Photo cell monitors daylight and limits the maximum light level in the daylight zone, multiple zones can be controlled from one sensor with independent level settings for each. (Not required in rooms windows or that have a load <150W in sidelight)

## ADDITIONAL OPTIONS:

Up to 4-zones with single LL-EVO panel, additional EVO-4X, EVO-8X expansion panels available for up to 16 zones. Additional LightSync switch stations as needed up to 32. Optional LightSync Touch Screen station with scene recall, capture and slide dimmer control. AV interfare for RS-232/485, Mobile LS Link APP interface. LL-EVO control panel can connect to ILC network for building control (C405.2.2.1). Emergency lighting control bypass relay for UL-924 can be added as needed.

## CODE REQUIREMENTS SUPPORTED:

Auto-Off from Occupancy sensor (C105.2.1.1)  
Lighting Reduction (C405.2.2.2)  
Daylight control (C405.2.3.2)  
Local Switch control w/dimming (C405.2.2.3)

WIRE LEGEND	
	Line voltage
	0-10V Dimming
	CAT-5e Data cable
	3-Wire Occupancy Sensor or Photo Cell

Bill Of Material:		
Qt:	Product:	Description:
1	LL-EVO	EVO Controller
4	R20D	Remote 20Amp Dimming relay
2	LSG3-WH-5-S	LightSync G3 5 Scene dimming digital switch station.
1	PC-IND	Photo Cell - Indoor.
2	ILC-SWX-221-1	Occupancy sensor Ceiling Dual Tech - 500sf

LL-EVO Lighting Application: FC