



LIGHT *Sync* Touch Switch

Digital Touch Switch

- Durable vandal resistant data line switch station
- Made in the USA
- 1 to 3 button configurations
- Status indicators for true relay, group or preset status
- Mounts in a standard single gang electrical box
- Engraved button identification available
- Hardwired version available



Overview

The LightSync Digital Touch Switch station offers a durable switch that is resistant to impact and vandalism. Switch stations are available with 1 to 3 highly durable push button switches and have a status LED associated with each button. Each button may be programmed to control any relay(s), group(s) or preset(s) throughout the network. Switch faceplates are available in four colors, stainless steel, or brushed aluminum and are supplied with switch plates.

Features


- **Durable** vandal resistant data line switch station
- **Made** in the USA
- **Buttons** range from 1 to 3 per station
- **Audible** switch beeps upon activation
- **Programmable buttons** control any relay(s), group(s) or preset(s)
- **Status LEDs** for indicating the true state of a relay, group or preset
- **Faceplates** are available in white, ivory, gray, black, stainless steel and brushed aluminum
- **Mounts** in a standard single gang box
- **Engraving** is available for switch identification
- **Remote mount** anywhere on the LightSync network
- **Self powered** from the network
- **RJ45 connectors** provided for easy connection
- **Addressable** rotary switches
- **Decora**® style matching switch plate provided
- **Hardwired** version available



LIGHT *Sync* Touch Switch

Digital Touch Switch

Physical

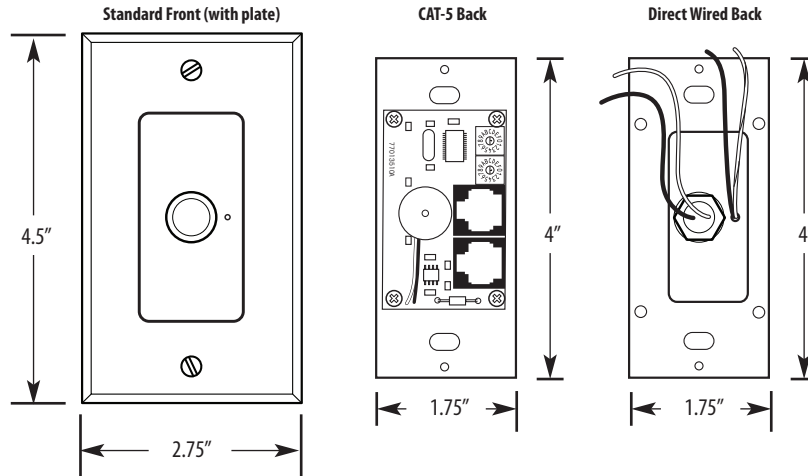

Specifications

Physical:

- Standard single gang mounting
- Digital addressing switches
- RJ45 connectors provided for easy connection
- Screw or screwless plates are available
- Mounting screws provided
- Engraving up to 10 characters
- Stainless Steel Switch

Switch Plates:

- Lexan® (screwless)
- Brushed Aluminum (visible screws)
- Stainless Steel (screwless/visible screws)
- Painted (visible screws)

Electrical:

- Powered from the panel or LightSync network
- 200,000 electrical life cycles

Operating Environment:

- Location: Interior space
- Operating Temp.: 0° to 50° C
- Humidity: 10% - 90% Non-condensing
- Atmosphere: Non-explosive/corrosive
- Vibration: Stationary
- Switch Ingress Protection: IP68

Certifications and Approvals:

- FCC Part 15

Ordering

Switch				Plate				
LS-TS	-		-		-		-	
Series: LightSync Touch Switch		CAT-5 cable (C) Direct wired (W)		Number of buttons (1 to 3)	Series: LightSync Plate	Plate Cover: Plain (P), Screws (S)		Number of Gangs (1 to 4)
Insert color: Ivory (IV) White (WH), Black (BL), Gray (GY), Stainless Steel (SS) or Brushed Aluminum (AL)				Plate color: Ivory (IV) White (WH), Black (BL), Gray (GY), Stainless Steel (SS) or Brushed Aluminum (AL)				
<p>LightSync Touch Switch button positions</p>				<p>LightSync Switch plates 1-4 gang</p>				