
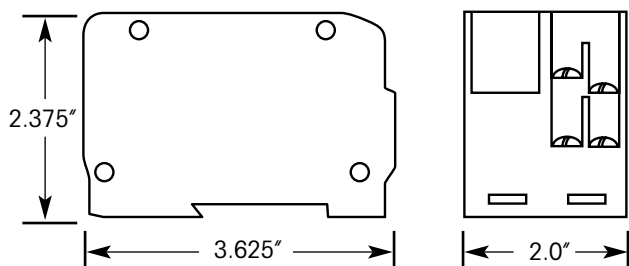


# Aromat 2-Pole 20 AMP 208/240/277/480 VAC Relay

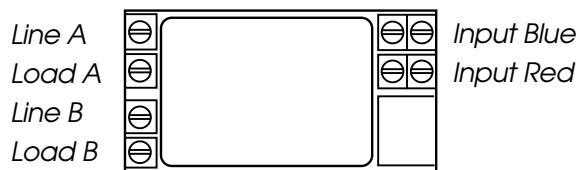

ILC 2PC Contactors offer a unique solution to the control of 208/240/277 or 480 VAC loads. These contactors mount within our standard Intelligent Lighting Controllers, eliminating the need for additional cabinetry as is so often the case with other contactor arrangements. Consult factory for spacing requirements.

## General Information

- UL Listed, CSA Certified
- Mounts in standard ILC cabinetry
- DIN rail or spring capture bracket mounting
- Operates in any position

## Line Voltage Characteristics

- Contacts: Double pole latching
- Terminals: 2 per pole
- Screw-actuated clamps for use with #14-10 AWG solid or stranded copper wire only

## Low Voltage Characteristics

- Input: Reversible polarity 350mA 24VDC
- Aux. Contacts: 1A 125V AC
- Operating voltage: Nominal 18-30 VAC (+/- 10%) rectified (minimum at relay = 18 VAC rectified) 15 VDC (+/- 10%) filtered
- Duty Rating: Momentary
- Minimum activating pulse time: 50 milliseconds

## Physical:

- Mounts in standard ILC cabinetry
- Operates in any position

## Electrical:

- 208, 240, 277 or 480 VAC
- Ballast loads to 20 amps
- Resistive loads to 20 amps

## Operating Environment:

- Location Interior Space
- Operating Temperature 0° to 60° C (32° to 140° F)
- Relative Humidity 10% to 95%
- Atmosphere Non-condensing, Non-explosive, Non-corrosive
- Vibration Stationary application NEMA Level A

## Certifications:

- UL, CSA