


# 16 VAC Control Transformer

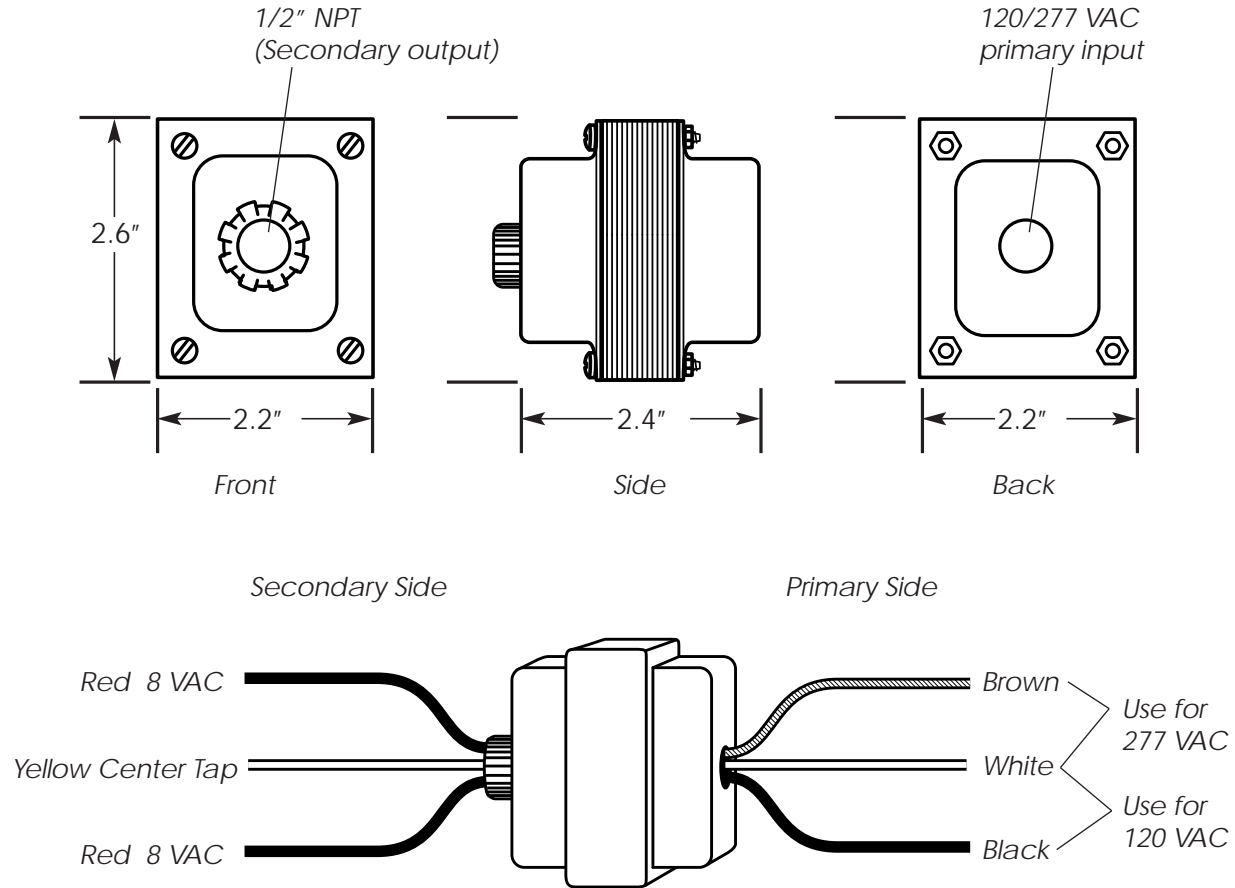

## General Information

- Multi-tap transformer designed for ILC lighting controls
- Model 1186-1001B
- 120 or 277 VAC primary
- 16 VAC secondary with center tap
- Color coded wires
- Internal resettable circuit protection on secondary side
- Operates in any position
- Class 2 Not Wet
- Class 3 Wet
- UL recognized (UL 1585)

## Line Voltage Characteristics

- Primary: 120 or 277VAC, 60HZ
- Secondary: 16 VAC CT, 24 VA

## Physical:

- Operates in any position

## Electrical:

- 120 or 277 VAC input
- 16 VAC CT output

## Operating Environment:

- Location Interior Space
- Operating Temperature 0° to 60° C (32° to 140° F)
- Relative Humidity 10% to 95%
- Atmosphere Non-condensing, Non-explosive, Non-corrosive
- Vibration Stationary application, NEMA Level A

## Certifications:

- UL