


LightSync™ Data Line Key Switch

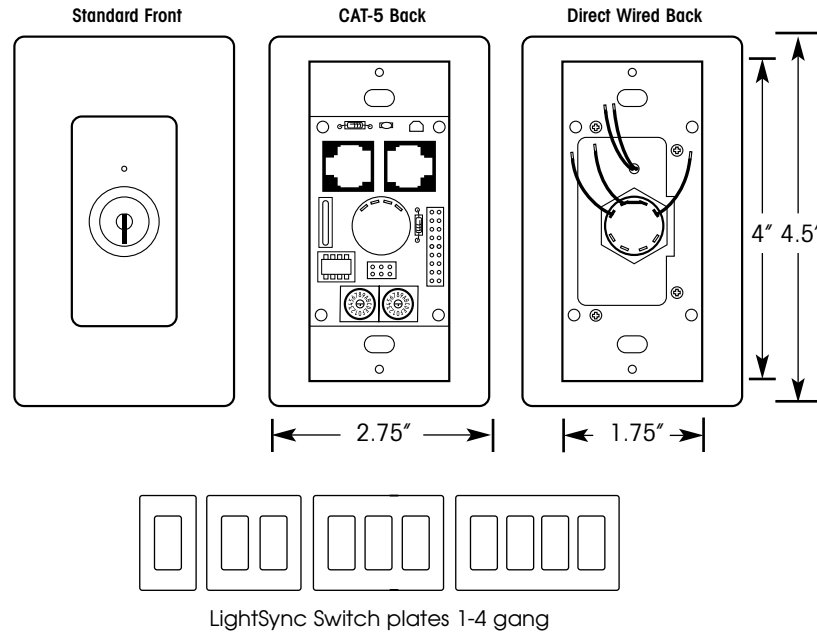

General Information

- Secure switching and control
- Momentary or Maintained keys with or without LED pilot light
- Durable anodized brushed aluminum or stainless steel plate
- Available in standard configurations
- Engraved lettering
- Mounts to standard electrical gang boxes.
- Custom options such as special colors or material available upon request

Switches

- Key Switch control stations are supplied with heavy-duty Single pole single or double throw (SPDT or SPST), Momentary or Maintained Key Switches

Switch Identification

- Engraved: Lettering is engraved directly into plate surface

LED Pilot Lights

- LED pilot lights give true visual confirmation of current control status. LED ON indicates controlled circuit is ON; LED OFF indicates controlled circuit is OFF
- Each switch may be provided with a solid state LED pilot light
- Colors: Green or Red

Physical:

- Plate material:
 - Lexan®
 - Painted steel/visible screws
- Mounts in standard one gang box spacing
- Mounting screws provided
- Switch colors:
 - Ivory, White, Black, Gray
- Switch Identification:
 - Optional engraved (10 char. max.)

Electrical:

- Switch plates provided with with momentary or maintained key switches for ON/OFF operation
- Single pole single or double throw (SPDT or SPST), momentary or maintained
- Powered from LightSync data line

Operating Environment:

- Location Interior space
- Operating Temperature 0° to 60° C (32° to 140° F)
- Relative Humidity 105 to 95%
- Atmosphere Non-explosive, Non-corrosive
- Vibration Stationary application
NEMA Level A