


LightSync™ Data Line Transient Suppressor

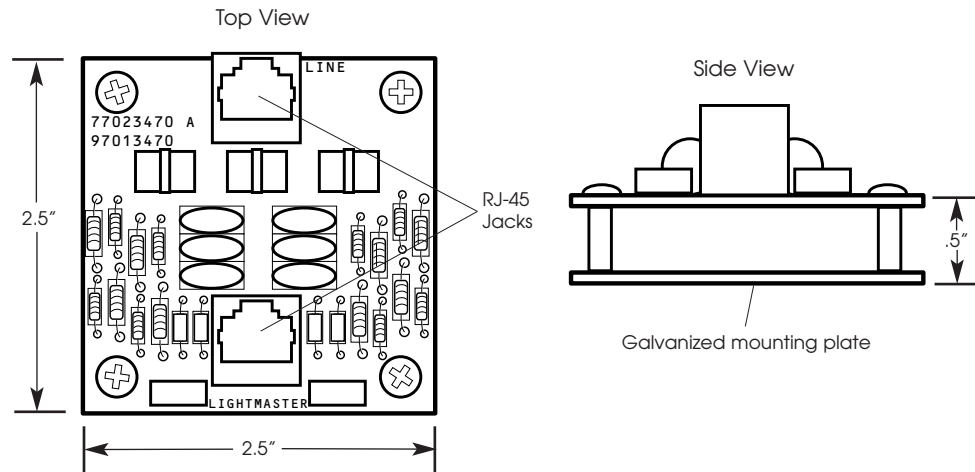

General Information

- Suppresses spikes and surges on the LightSync data line
- Mounts directly in the panel or remotely
- RJ-45 connectors for standard CAT-5 cable
- All mounting hardware included
- Grounding is provided through the mounting bracket
- No external power required

Physical:

- Mounts in controller or remotely
- Galvanized mounting plate
- Compact 2.5" x 2.5" size
- 2 RJ-45 jacks for in/out connections

Electrical Protection:

- Nominal Voltage 5-15 VDC, 3-10 VAC
- Maximum Continuous Operating Voltage 17 VDC, 12 VAC
- Designed to meet surge rating ANSI/IEEE C62.41-1991 Cat. A

Operating Environment:

- Location Interior space
- Operating Temperature 0° to 50° C (32° to 112° F)
- Relative Humidity 10% to 95% Non-condensing
- Atmosphere Non-explosive, Non-corrosive
- Vibration Stationary application NEMA Level A