


LightSync Line Voltage Dimmer Details

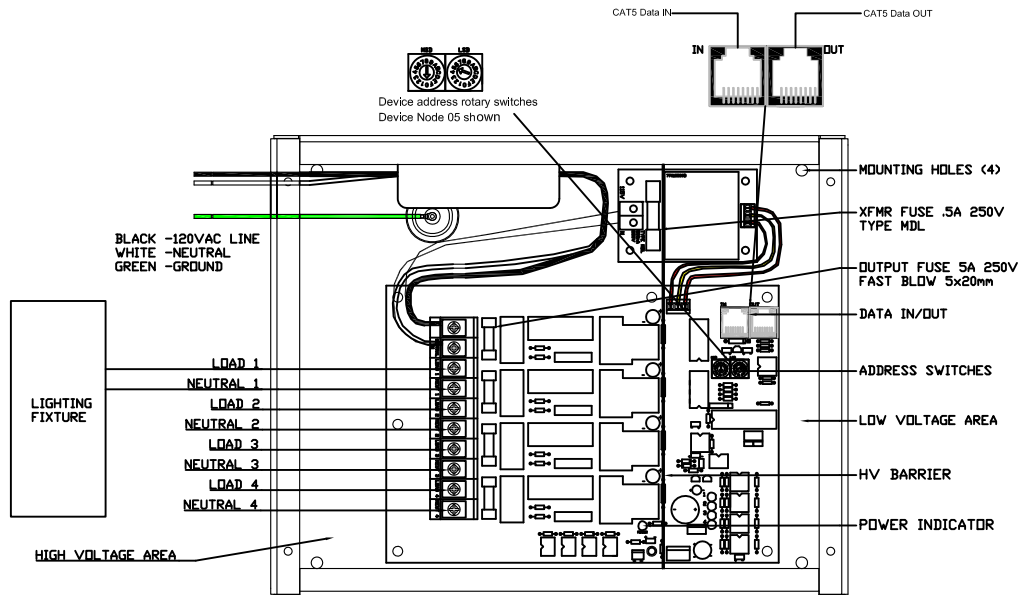

General Information:

- 4 independent channels for up to 4 zones
- Relay control for turning loads On/Off
- Galvanized NEMA1 enclosure
- 12.5" wide x 10" high x 4" deep
- Screw cover
- Knockouts provided
- Screw connectors for each output
- Neutral wire terminations included
- Fused outputs
- Digital addressing switches
- RJ45 connectors for data connections

Electrical:

- 120VAC
- 60Hz
- 20 Amps
- 4- 500 watt outputs

Operating Environment:

- Location: Interior
- Operating Temp: 0 - 40 deg. C
- Humidity: 10% - 100% Non-Condensing
- Atmosphere: Non-explosive/corrosive
- Vibration: Stationary

Certifications and Approvals:

- UL
- CUL
- FCC Part 15



INTELLIGENT LIGHTING CONTROLS, INC.
www.ilc-usa.com 1-800-922-8004

PD0620 REV A