


LightSync™ D-6 Data Line BAS Interface

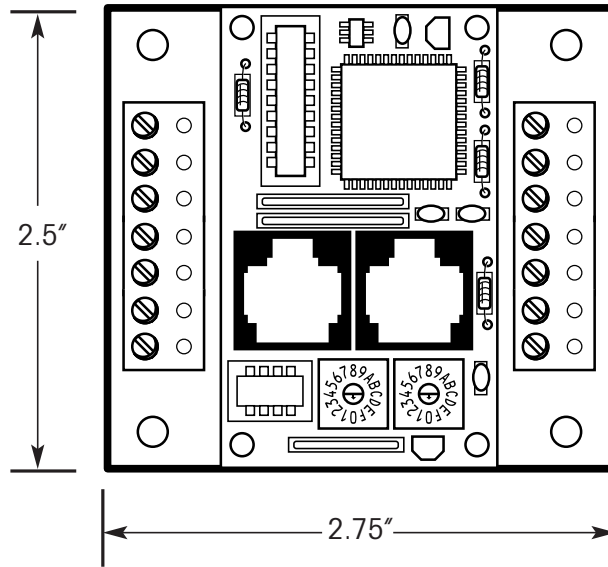

General

- CAT-5 wire control interface
- Maintained Contact
- 6- contact inputs
- 6- open collector outputs
- Provides interface for control of other systems
- BAS system interface
- Security system interface
- UL Listed
- FCC approval for commercial use

Characteristics

- Inputs: 6 Maintained (DC- = Active)
- Outputs: 6 Open collector
- Termination: standard screw terminals
- Screw-actuated clamps for use with #18 AWG solid or stranded wire
- LightSync data line addressable

Physical:

- Mounts in controller or remotely

Electrical:

- 5ma at 24VDC
- 10-30 VDC (supplied by BAS)
- Inputs may be driven by open collector or dry contact outputs (DC- = Active)
- 100ma open collector outputs

Capacities:

- 6 switch inputs
- 6 open collector outputs

Operating Environment:

- Location Interior Space
- Operating Temperature 0° to 60° C (32° to 140° F)
- Relative Humidity 10% to 95%
- Atmosphere Non-condensing, Non-explosive, Non-corrosive
- Vibration Stationary application NEMA Level A