


LightSync™ Data Line Switch

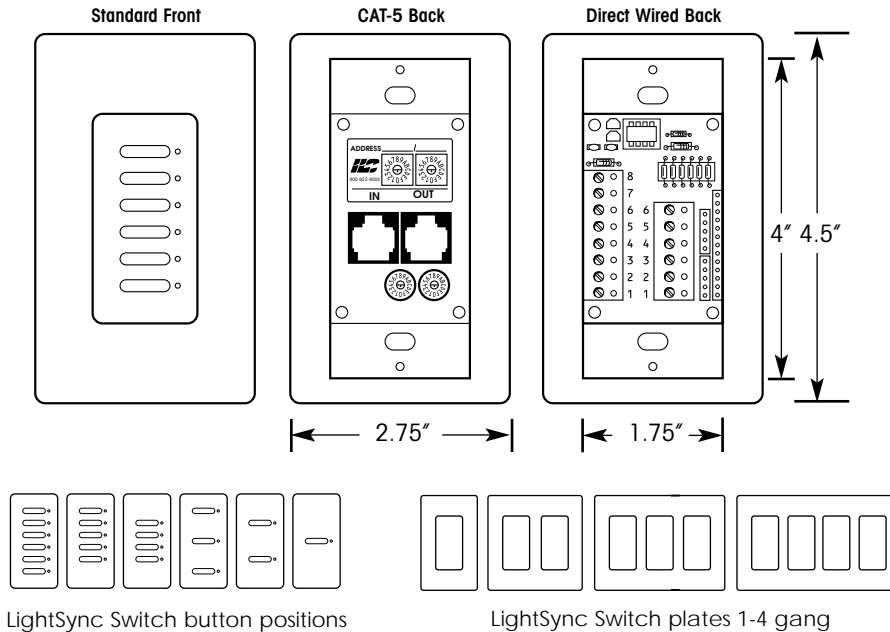

General Information

- Mounts in standard wall boxes
- Status LED for each button provides true relay status, not just programmed switch status
- Matching screwless wall plate
- Program LightSync switches to any number of relays in any number of panels
- Available in CAT-5 cable or direct wired configuration
- Add LightSync switches anywhere along the data cable
- Custom engraving available
- Operates in any position
- UL Listed, FCC approved

Characteristics

- Contacts: Momentary pushbuttons
- Termination: RJ-45 connector with standard CAT-5 cable
- Set node address on back of switch
- Standard Lexan® plastic construction plates available in four colors (painted steel with visible screws optional)
- Quiet "click" provides both tactile and audible feedback when actuated
- Switches are digitally addressable on LightSync data line
- CAT-5 capability eliminates the need for "home run" wiring

- FCC approved for commercial/industrial applications
- One year warranty

Physical:

- Plate material:
 - Lexan®
 - Painted steel/visible screws
- Mounts in standard one gang box spacing
- Mounting screws provided
- Switch colors:
 - Ivory, White, Black, Gray
- Switch Identification:
 - Optional engraved (10 char. max.)

Electrical:

- Powered from LightSync data line

Operating Environment:

- Location: Interior space
- Operating Temperature: 0° to 60° C (32° to 140° F)
- Relative Humidity: 10% to 95%
- Atmosphere: Non-condensing, Non-explosive, Non-corrosive
- Vibration: Stationary application, NEMA Level A