

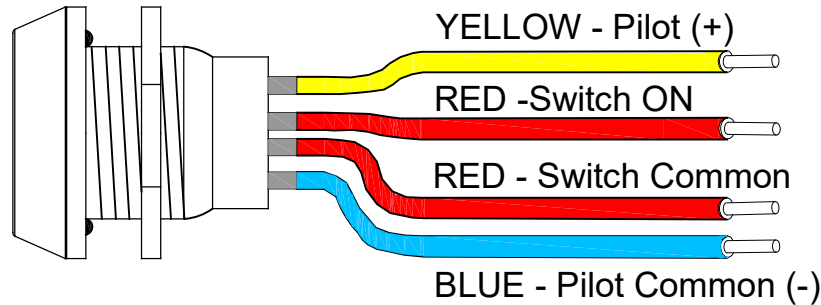


# Wet Location Touch Switch 19mm, 27mm Details





WTS Push Button Switch with LED Status Ring  
Momentary closure, IP65 rated with silicone rubber O-ring

## WTS 19mm

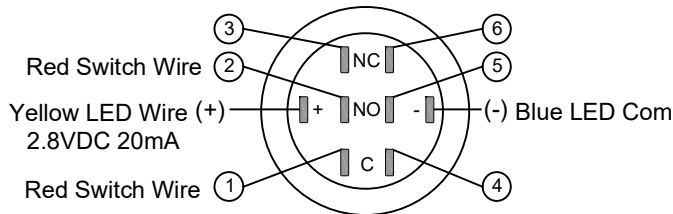

DPDT on-on momentary  
Contacts: 2A, 24VDC

## WTS 27mm

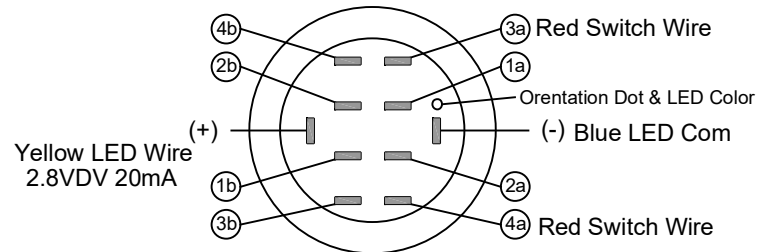

DPDT on(off) - off(on) Momentary  
Contacts: 2A, 48VDC

The Wet Location Touch Switch hardware assembly will come with 1, 2 or 3 push buttons in a single gang stainless steel faceplate with Neoprene gasket. Weatherproof wirenuts provided for extending the wire from wet location installation to the control inputs installed in a dry location.

1st Red wire terminates to the switch common terminal.

2nd Red wire terminates to the switch input terminal.

Yellow LED Pilot wire (+) terminates to the status pilot terminal.

Blue LED Pilot wire (-) terminates to the status pilot common terminal

The LED operates at 2.8VDC, 20mA and is not supplied with limiting resistor. LED pilot circuits at 24VDC require a 10K Ohm resistor in series.