
(F1) LL-EVO 1-Room, 3-Zone, 1-Dalight Zone



LightLEEDer EVO 3—Zone panel with 3—remotly mounted R20D relays. Daylight sensor with independent zone settings, Motion sensor inputs for up to 4 independent zones or local hardwire switch. Optional plug—load relay. Local LightSync output for Multi—Zone Dimmer (MZD) station with raise/lower press—n—hold dimming, supports from 1 to 8 LightSync input devices.

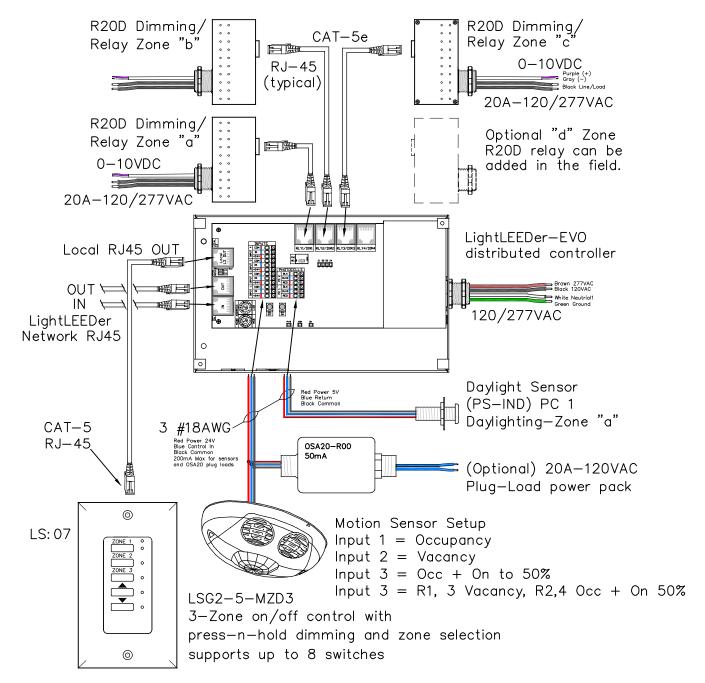

Proiect:

5229 Edina Industrial Boulevard Minneapolis, Minnesota 55439 Ph: 952.829.1900 Fax: 952.829.1901 1.800.922.8004 www.iic-usa.com (F1) LL-EVO Lighting Application Sheet 1-Room, 3-Zone, 1-Daylight Zone LightLEEDer EVO Distributed Controller

	SHEET INFORMATION	1
	DATE: 2-15-2018 SCALE: NONE DRAWN BY: JM&BE	
	GO#	Sheet:
		F1-EVO