
(F1) LL-EVO 1-Room, 4-Zone, 1-Daylight Zone



LightLEEDer EVO 4—Zone panel with 4—remotly mounted R20D relays Daylight sensor with independent zone settings, Motion sensor inputs for up to 4 independent zones or local hardwire switch. Optional plug—load relay. Local LightSync output for Multi—Zone Dimmer station (MZD) with raise/lower press—n—hold dimming, supports from 1 to 8 LightSync input devices.

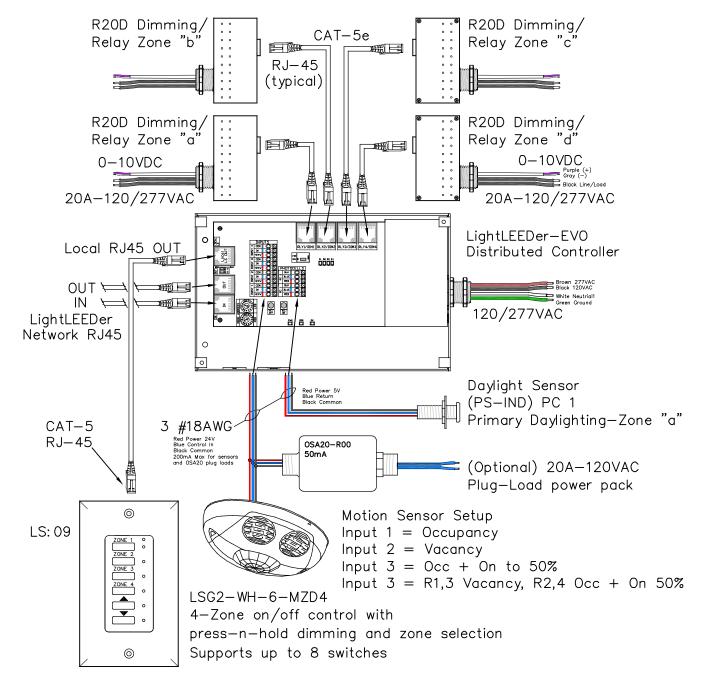

Proiect:

5229 Edina Industrial Boulevard Minneapolis, Minnesota 55439 Ph: 952.829.1900 Fax: 952.829.1901 1.800.922.8004 www.lic-usa.com (F1) LL-EVO Lighting Application Sheet1-Room, 4-Zone, 1-Daylight ZoneLightLEEDer EVO Distributed Controller

SHEET INFORMATION	
DATE: 2-15-2018	
SCALE: NONE	
DRAWN BY: JM&BE	
GO#	Sheet:
	F1-EVO