
(F4) Tow Office, 1 or 2-zone, 2-daylight zone



LL-EVO panel used for controlling 2 independent rooms with 2 zones each LightLEEDer EVO 4-Zone panel with 4-remotely mounted R20D relays. Two daylight sensor inputs with independent zone settings, motion sensor inputs two for each room with Occupancy-50% or Vacancy operation. Local LightSync MZD digital Multi-Zone Dimmer station with raise/lower for 1 or 2 Zone with press-n-hold dimming. Supports 1 to 8 LightSync input devices.

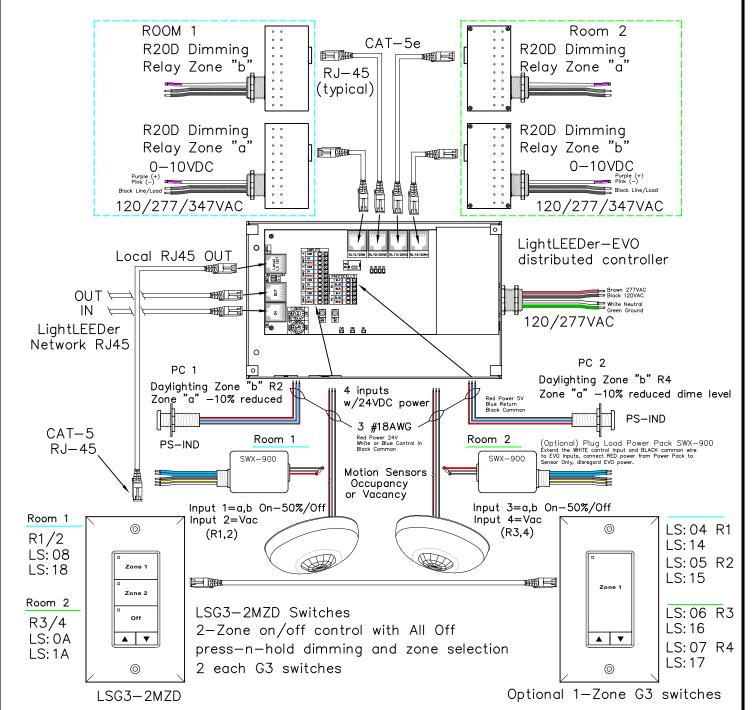

(F3) Two Office Pre-Program Control2-Room, 2-Zone, 2-Daylight ZoneLightLEEDer EVO Distributed Controller

	SHEET INFORMATION DATE: 1-14-2022 SCALE: NONE DRAWN BY: JM	
	GO#	Sheet:
		F4-EVO

Rev: E