
## (F9) LL-EVO 1-Room, 4-Zone, 1-Daylight Zone Motion Sensor 100% Occupied/ 50% Vacantcy Dimming



LightLEEDer EVO 4—Zone panel with 4—remotly mounted R20D relays Daylight Sensor w/ Independent zone settings, Motion sensor inputs for up to 4 independent zones or local hardwire switch. Optional plug—load relay. Local LightSync output for Multi—Zone Dimmer station (MZD) with raise/lower press—n—hold dimming, supports from 1 to 8 LightSync input devices.

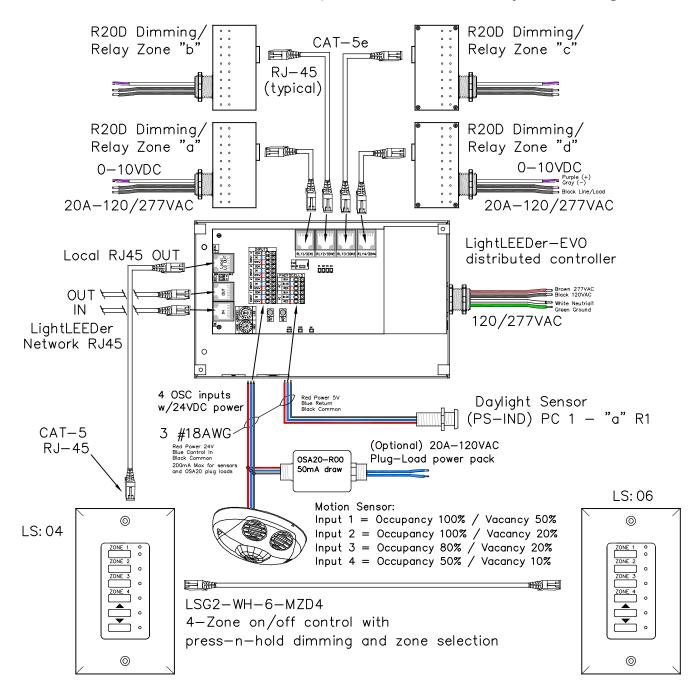

5229 Edina Industrial Boulevard Minneapolis, Minnesota 55439 Ph: 952.829.1900 Fax: 952.829.1901 1.800.922.8004 www.ilc-usa.com (F9) LL-EVO Lighting Application Sheet 1-Room, 4-Zone, 1-Daylight Zone, Motion Sensor 100% Occupied / 50% Vacant LightLEEDer EVO Distributed Controller

DRAWN BY: JM&BE	
Sheet:	