Catalog Number: Date: Project:



www.ilc-usa.com

LightSync Digital

**DMX Driver Module** 

## **Overview**

The LightSync Digital DMX Driver Module is designed to drive DMX512 levels from a LightLEEDer lighting controller using RS485 communications. Each LS DMX Driver Module is capable of controlling up to 64 channels per module, per panel in the LightLEEDer system. Each dimming output channel can be mapped to control from 1 to all of the 512 DMX channels. This module connects to the local port of any LightLEEDer panel or LLEVO and is addressed as one or multiple dimmer modules. It can be mounted in the LL panel or remotely.



## **Features**


- Made in the USA
- Digital CAT-5 Ready
- DMX512 output driver
- Supports the full 512 DMX channels
- **Direct control** of any DMX channel from the lighting control panel
- Map any dimming output channel to any DMX channel
- 64 dimming output channels per panel

- Controlled using LightLEEDer options which include; includes timers, presets, inputs, G3 switches, scenes, and touchscreens
- Installs directly into any panel or remotely
- Configured through the LL Keypad, LL Pro software, or ILC Pro App
- **DMX mapping** can be 1 to 1, or programmable with LightLEEDer DMX Output Map software

# Warranty

Six-year limited warranty

# **Ordering**

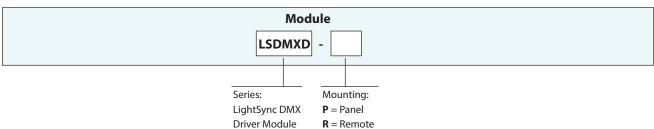

© INTELLIGENT LIGHTING CONTROLS 952.829.1900

Catalog Number: Date: Project:




www.ilc-usa.com

LightSync Digital

**DMX Driver Module** 

# **Physical**



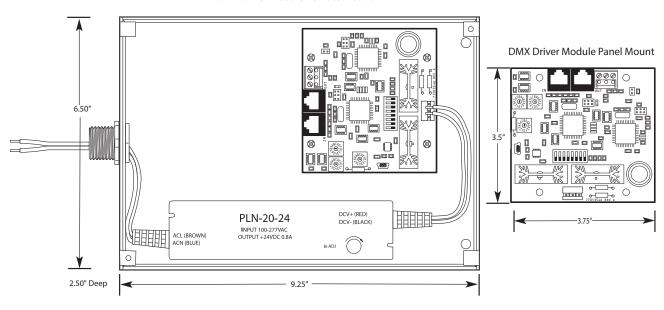

## **Specifications**

#### **Physical:**

- 3.75" wide X 3.50" high
- Screw connector for DMX
- $\bullet \, \mathsf{USB} \, \mathsf{mini} \, \mathsf{software} \, \mathsf{programming} \, \mathsf{interface} \,$
- Rotary address and range switches
- Configuration dip switches
- Status diagnostic LEDs provided
- · Data line terminator resistor enable jumper
- Easy installation into any panel

### **Remote Mount Physical:**

- Enclosure: 6.50" x 9.25" x 2.50 " with screw cover
- 1/2" nipple for mounting to an electrical box
- $\bullet\, 6'' \, wire \, leads \, provided \, for \, high \, voltage \, connection$
- Push-to-connect low voltage connections
- · Provided with pre-drilled mounting holes

#### **Electrical:**

- 120/277VAC • Current: 150mA
- Voltage: 24VAC/ 24VDC

### **Operating Environment:**

- Location: Interior space
- Operating Temp: 0°-50° C
- Humidity: 10%-90% Non-condensing
- Atmosphere: Non-explosive/corrosive
- Vibration: Stationary

#### **Certifications and Approvals:**

• UL CUL