# 


### www.ilc-usa.com

Apprentice 3

**Hardwired Photo Sensor** 

## **Overview**

The Hardwire Photo Sensor monitors light levels and signals the lighting control panel's inputs. Each sensor has 10 adjustable set points for on or off control. Each sensor has a built-in filter to eliminate false triggering from lightning or other sudden light sources. The indoor and outdoor photocell heads convert the analog light levels to a digital form and are UV and weather resistant.

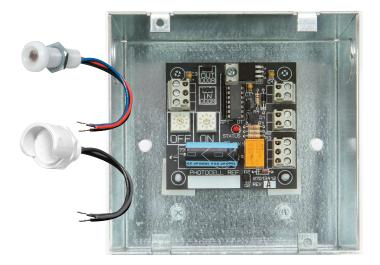

## Features


- Made in the USA
- Light levels are monitored indoors or outdoors to 1000 foot candles
- Hardwire directly to panel inputs
- Adjustable for indoor and outdoor ranges
- Control points consist of 10 adjustable On and Off settings
- Analog to digital photocell heads

- Photocell filter to eliminate false triggering of loads
- Photocell head connectors are screw-to-connect type
- Remote controller can be mounted up to 5000 feet from lighting panel
- UV resistant photocell heads
- Encased photocell head protects sensor from the elements

# Warranty

One-year limited warranty

# Ordering

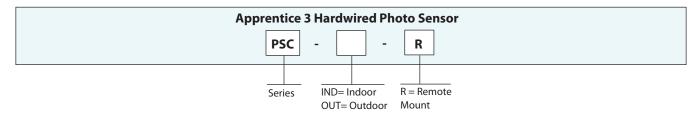

Project:

# 


#### www.ilc-usa.com

Project:

Apprentice **3** 

Hardwired Photo Sensor

# **Physical**

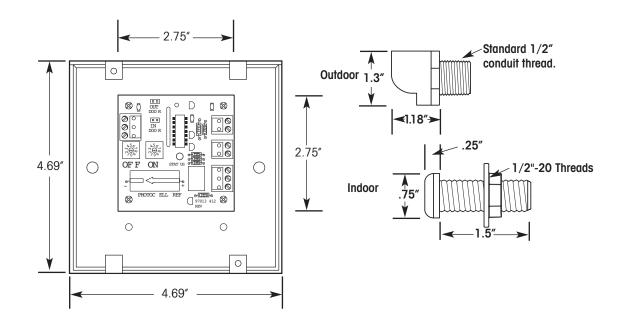

Date:

## **Specifications**

## Safeguards:

• Photocell filter eliminates false triggering of loads

## **Controller Physical:**

- Enclosure: 4.69" wide X 4.69" high X 2.00" deep
- Cover Included
- Screw connections
- Clearly marked labels
- Digital output and Form C SPDT output

## **Photocell Heads:**

- Outdoor photocell mounts in a 1/2" LB type fitting or junction box
- Indoor photocell mounts to ceiling tile or other structure

## **Electrical**:

- Power supply: 25mA max. @ 9 VAC/12 VDC
- Open collector output: 50mA maximum
- Dry contact output: 2 amps @ 30 VDC

## **Controller Operating Environment:**

- Location: Interior Space
- Operating Temp.: 0° to 50° C
- Humidity: 10% to 90% Non-condensing
- Atmosphere: Non-explosive/corrosive
- Vibration: Stationary

## Photocell Operating Environment:

- Location: Interior/Exterior Space
- Operating Temp.: -35° to 50° C
- Humidity: 10% to 100% Condensing
- Atmosphere: Non-explosive/corrosive
- Vibration: Stationary

### **Certifications:**

UL CUL
FCC Part 15