


# Wet Location Touch Switch Input Module Wiring Details

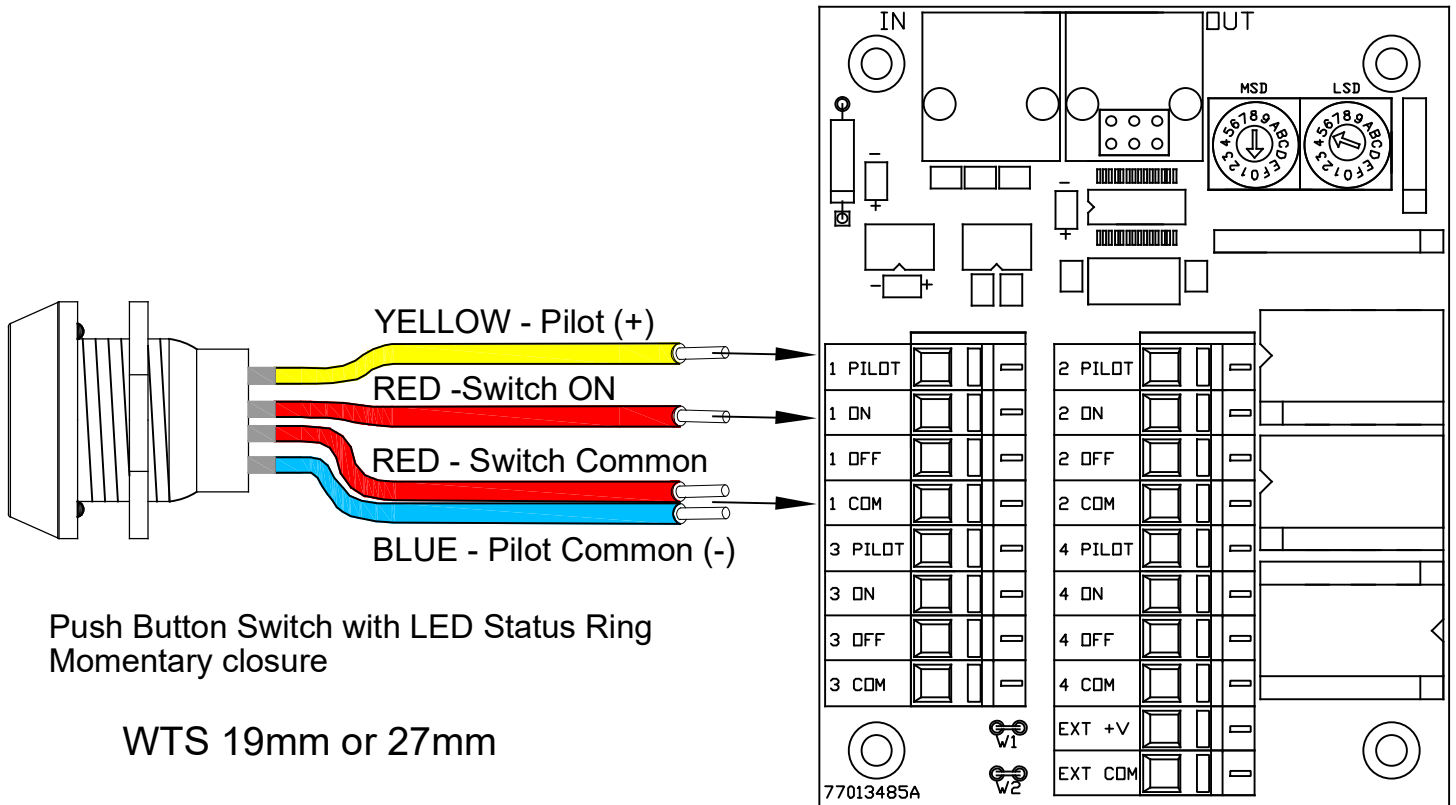

The Wet Location Touch Switch hardware switch assembly will come with 1, 2 or 3 push buttons in a single gang stainless steel faceplate with Neoprene gasket and weatherproof wirenuts provided for extending the wire from wet location installation to the LS-IM installed in a dry location .

Terminate one Red wire from the switch and the Blue LED wire in the Common terminal of the LightSync Input Module for each switch. Terminate the Yellow LED Pilot wire (+) at the the Pilot terminal. Terminate the 2nd RED wire from the switch to the On input terminal. Additional switches are terminated at inputs 2 or 3.