


**Apprentice 3**

**LightSync Classic Data Line Switch**

**Overview**

Whether you use the LightSync Digital Switch with on a Apprentice 3 lighting control network or with a standalone Apprentice 3 lighting control panel, the LightSync Switch provides the flexibility that you need for your lighting control application. Each switch button may be individually programmed to control any single relay, group of relays or presets within an Apprentice 3 panel or a network of AP3-X panels on the LightSync data line network. LightSync Switches are equipped with common CAT-5 cable RJ-45 connectors for quick and easy installation on the Apprentice 3 network.

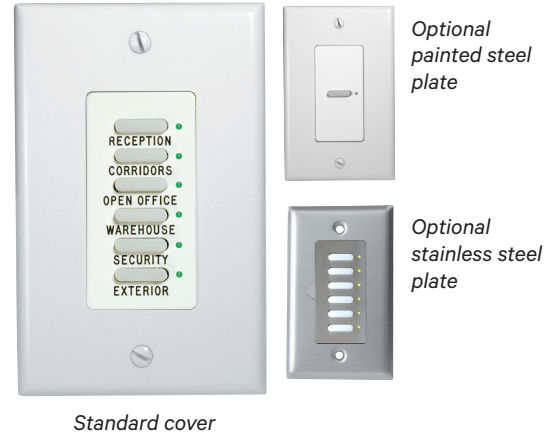

**Features**


- **Made in the USA**
- **Digital CAT 5** ready
- **Data line** pushbutton switch station
- **Buttons range** from 1 to 6 per station
- **Audible** switch beep upon activation
- **Program** each button to control any relay(s), group(s) or preset(s)
- **Status LEDs** for indicating the true state of a relay, group or preset
- **Faceplates** are available in white, ivory, gray, black, stainless steel and brushed aluminum
- **Mounts** in a standard single gang box
- **Engraving** is available for switch identification
- **Remote mount** anywhere on the LightSync network
- **Self powered** from the network
- **Addressable** rotary switches
- **Decora®** style matching switch plate provided

**Warranty**

One year limited warranty

**Ordering**


(Contact factory for available custom color and options.)

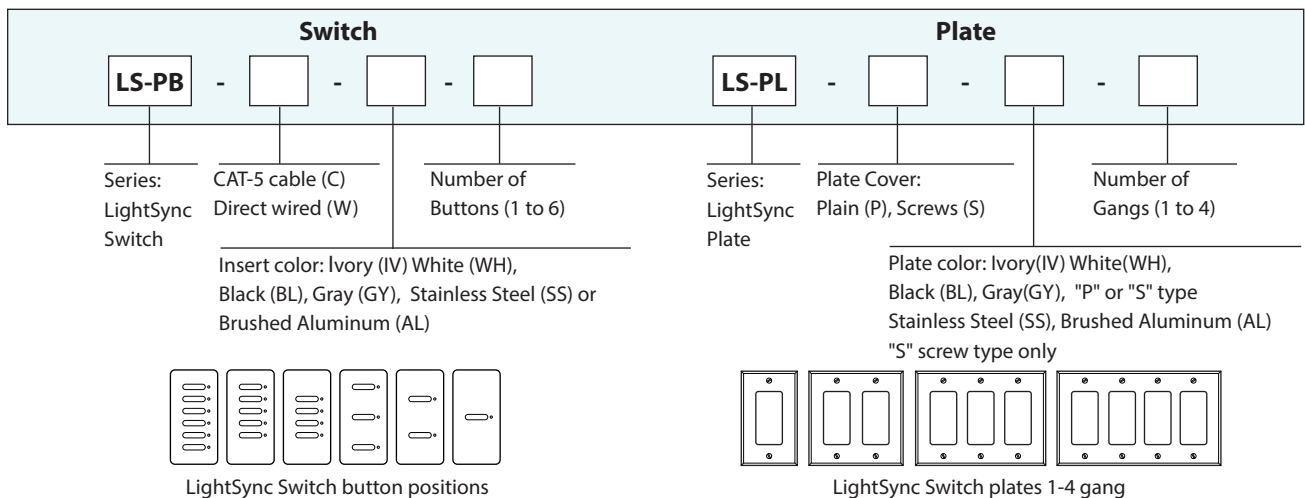

## Apprentice 3

## LightSync Classic Data Line Switch

## Physical

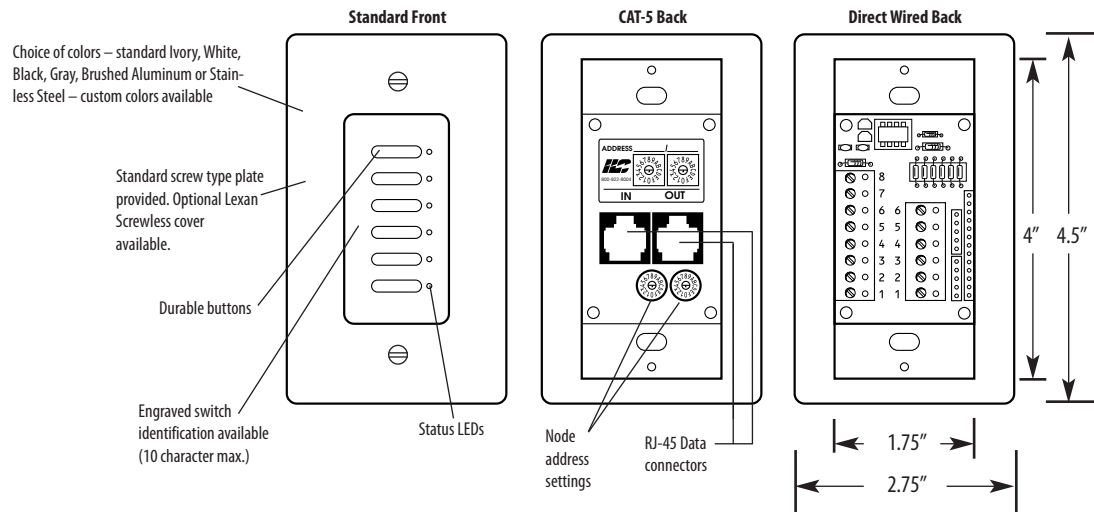

## Specifications

**Physical:**

- Standard single gang mounting
- Digital addressing switches
- RJ45 connectors provided for easy connection
- Standard Screw plate or screwless plate available
- Mounting screws provided
- Laser engraving available, up to 10 characters
- Available in ivory, white, black, gray, stainless steel and brushed aluminum

**Switch Plates:**

- Brushed Aluminum (visible screws)
- Stainless Steel (visible screws)
- Painted (visible screws)
- Optional Lexan® Screwless

**Electrical:**

- Powered the from panel or LightSync network

**Operating Environment:**

- Location: Interior space
- Operating Temp.: 0° to 50° C
- Humidity: 10% - 90% Non-condensing
- Atmosphere: Non-explosive/corrosive
- Vibration: Stationary

**Certifications and Approvals:**

- UL
- FCC Part 15