

**LightLEEDer** **Wet or Wash-Down Location Touch Switch**

### Overview

The Wet Touch Switch Station offers a durable push button or optional piezo switch that is ideal for medical or food-processing areas that are wet or require wash-down. Switches are rated to IP65. Protected from low pressure water jets from any direction and total dust ingress. Switch stations are available with 1 to 3 highly durable push button or optional piezo switches, and have a status LED built into each button. Each button may be individually programmed to control any relay(s), group(s) or preset(s) throughout the network. Switch faceplates are stainless steel and are supplied with a sealing plate gasket.




### Features

- **Made in the USA**
- **Durable** vandal and water resistant switch station
- **Life expectancy** up to 50 thousand electrical cycles
- **Sealed** for pressure washing or wet areas
- **Switch station** available in 1 to 3 button configurations
- **Buttons can be programmed** to control any relay(s), group(s) or preset(s)
- **Status LED ring** indicates the true state of a relay(s), group(s) or preset(s)
- **Stainless steel faceplates**
- **Mounts** in a standard wet location single gang box
- **Engraving** is available for switch identification
- **Custom** configurations available
- **Gasket** provided with switch station
- **Optional** solid state piezo switch

### Warranty

Six-year limited warranty


### Ordering

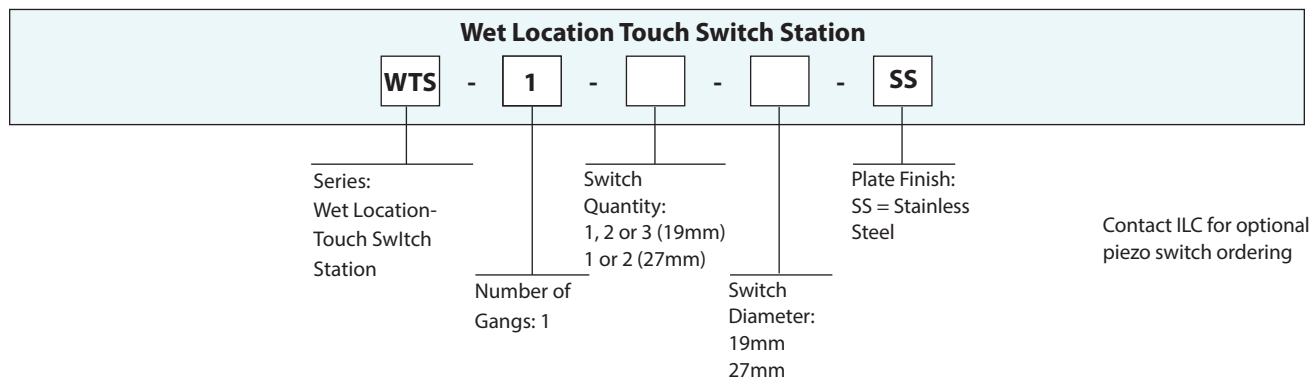


## LightLEEDer

## Wet or Wash-Down Location Touch Switch

## Physical

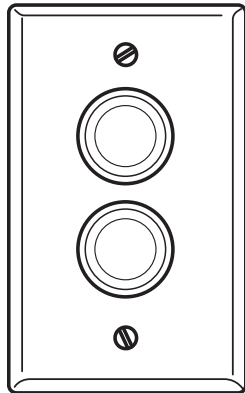

27mm Switch

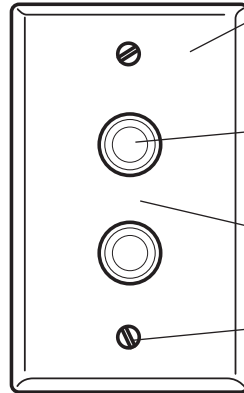

19mm Switch


Durable stainless steel

Push-button switch with LED ring


Optional engraved labeling

Standard screw type gang configurations


## WTS Switch Station Configurations




WTS-1-1-27-SS




WTS-1-1-19-SS



WTS-1-2-27-SS



WTS-1-2-19-SS



WTS-1-3-19-SS

## Specifications

**Physical:**

- Standard single gang mounting
- Stainless steel switch and switch plate
- Pigtail wires for termination
- Vandal and water resistant switch
- Waterproof connectors included
- Engraving up to 10 characters are available (4 characters for the 3 button switch)
- Gasket provided with switch station

**Switch:**

- Stainless steel
- Diameter of .87" or 1.10"
- Blue illuminated ring

**Electrical:**

- Current/voltage: 2A @ 24VDC
- LED: 20mA @ 2.8V
- 50,000 electrical life cycles

**Operating Environment:**

- Location: Interior/Exterior space
- Operating Temp.: -20 to 55 C°
- Switch Intrusion: IP65
- Atmosphere: Non-explosive/corrosive