

## LightLEEDer-EVO

## Remote 40D Relay

## Overview

The ILC Remote 40 Dimming (R40D) relays are designed to be mounted at the power junction box or lighting fixture for direct control of the lighting load. Relays are controlled from the EVO panel using a standard CAT-5 cable connection to the R40D relay RJ-45 jack for easy installation. The R40D series relay uses oversized contacts designed to handle LED inrush current, tested at 16 Amps electronic driver that can commonly exceed 200% of running current. The R40D is a latching relay to eliminate power consumption. The R40D has galvanically isolated 0-10V dimming from the LL-EVO panel for direct wiring to the dimming driver without needing to pull separate 0-10V wiring back to the controller. It also features a manual toggle switch for ON/OFF activation. Power loss failure at the EVO panel will force dimmer output level to 100%.




## Features

- **Made in the USA**
- **Digital Cat-5 Ready**
- **Remote R40D** controlled from LL-EVO panel up to 100 feet
- **Electronic Ballast** high current inrush load rating
- **Plug-load** compatible
- **Latching** relay holds position without presence of power, saving energy
- **Direct mounting** at power junction box or light fixture with 1/2" K.O.
- **RJ-45** connector for Cat-5 cable to EVO panel
- **6" Wire leads** for line/load and dimming connections
- **600V rated wire** allows 0-10V in high voltage compartment
- **Galvanically Isolated** 0-10 dimming control
- **100% Dim level** at power loss of the LL-EVO controller
- **UL and CUL listed**
- **Plenum rated** assembly

## Warranty

Six-year limited warranty


## Ordering

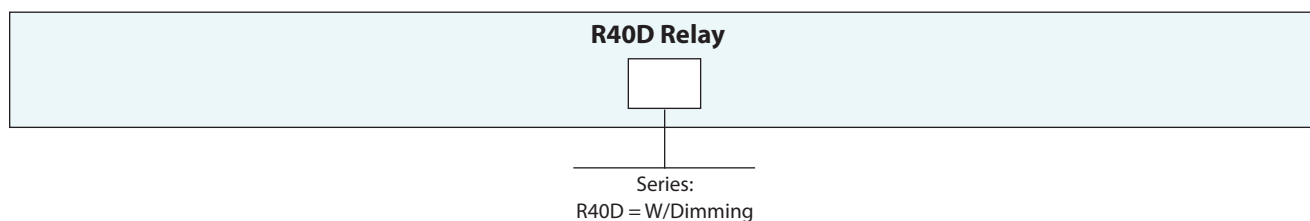

## LightLEEDer-EVO

## Remote 40D Relay

## Physical

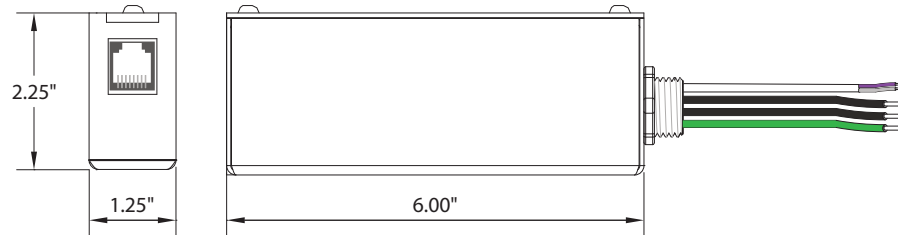

## Specifications

### Safeguards:

- Oversized contacts to extend relay life
- 600VAC rated 0-10V leads
- Galvanically isolation to 1500V for the 0-10VDC dimmer outputs, with revert to 100% on power loss

### Physical:

- Dimensions 6.00" x 1.25" x 2.25"
- Steel NEMA-1 enclosure
- 1/2" nipple for mounting to electrical box
- 6" wire leads for connections provided
- RJ45 connectors provide for easy connection

### Low Voltage Control:

- 100' operational distance from controller over CAT-5
- Isolated 0-10V dimming control for R40D relay

### Electrical:

- 16Amps, 120/277/347 VAC resistive
- 16Amps, 120/277/347 VAC general loads
- 16Amps, 120/277/347 VAC HID and ballast
- 16Amps, 120/277/347 VAC electronic ballast (LED)
- 1/2HP @120VAC motor load
- 100mA sink for 0-10V dimming
- Plug-load compatible

### Operating Environment:

- Location: Interior Space
- Operating Temp.: 0° to 50° C
- Humidity: 10% to 90% Non-condensing
- Atmosphere: Non-explosive/corrosive
- Vibration: Stationary

### Certifications:

- UL and CUL Listed
- FCC
- Plenum rated