


Overview

The LightSync Bluetooth Interface Tech Tool is a portable device for temporary quick and easy connection from the EVO Bluetooth App to an EVO panel. The LSBTI-Tech can be plugged in at the end of the LightSync run from an EVO panel or plugs directly into the local bus port of the EVO. With this interface the user can control or configure the EVO panel using the ILC Pro App. The LSBTI-Tech is great for quickly connect to an EVO and set-up the panels switch inputs and controls, the small size makes it an ideal tool for quick field connections.

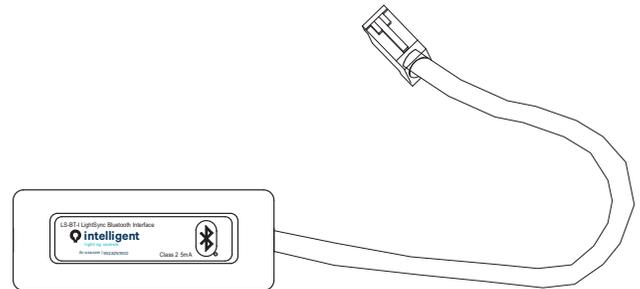


Features

- **Made in the USA**
- **Digital CAT 5** ready
- **Bluetooth** communication
- **25 + Feet** of RF range
- **Small size** for easy storage and portability
- **Control and Configuring** of EVO Panel using ILC Pro App
- **CAT-5 cable** provided for connection to Local LS port of panel
- **Powered** from the LightSync bus
- **No addressing** or physical set-up required


Warranty

Six-year limited warranty

Ordering

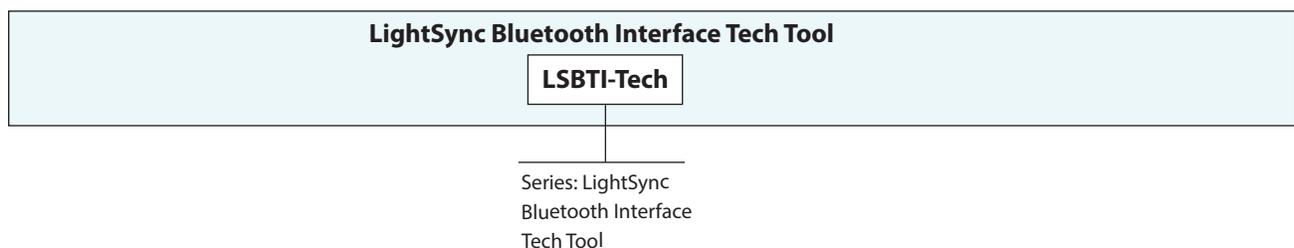

Physical

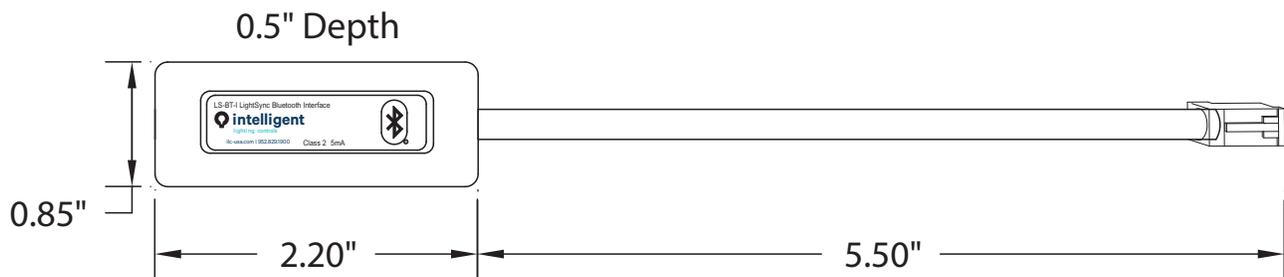

Specifications

Physical:

- Dimensions 2.20" x 0.85" x 0.5"
- 5.5" CAT-5 cable for connection
- Small size for easy storage

Electrical:

- Powered from Local LightSync network
- 12VDC

Operating Environment:

- Location: Interior Space
- Operating Temp.: 0° to 50° C
- Humidity: 10% to 90% Non-condensing
- Atmosphere: Non-explosive/corrosive
- Vibration: Stationary