


LightSync Digital **Classic Data Line Switch**

Overview

The LightSync digital classic data line pushbutton switch station offers a flexible switch that will meet your lighting needs. Switch stations are available with 1 to 6 pushbuttons and have a status LED associated with each button. Each button may be individually programmed to control any relay(s), group(s) or preset(s) throughout the network. Switch faceplates are available in four colors, plus stainless steel and brushed aluminum.

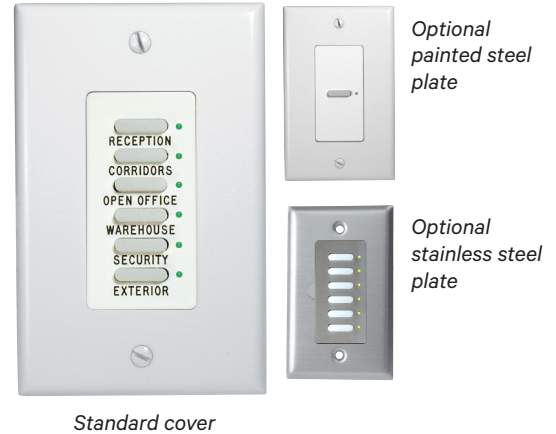


Features

- **Made in the USA**
- **Digital CAT 5** ready
- **Data line** pushbutton switch station
- **Buttons range** from 1 to 6 per station
- **Audible** switch beep upon activation
- **Program** each button to control any relay(s), group(s) or preset(s)
- **Status LEDs** for indicating the true state of a relay, group or preset
- **Faceplates** are available in white, ivory, gray, black, stainless steel and brushed aluminum
- **Mounts** in a standard single gang box
- **Engraving** is available for switch identification
- **Remote mount** anywhere on the LightSync network
- **Self powered** from the network
- **Addressable** rotary switches
- **Decora®** style matching switch plate provided

Warranty

Six-year limited warranty


Ordering (Contact factory for available custom color and options.)

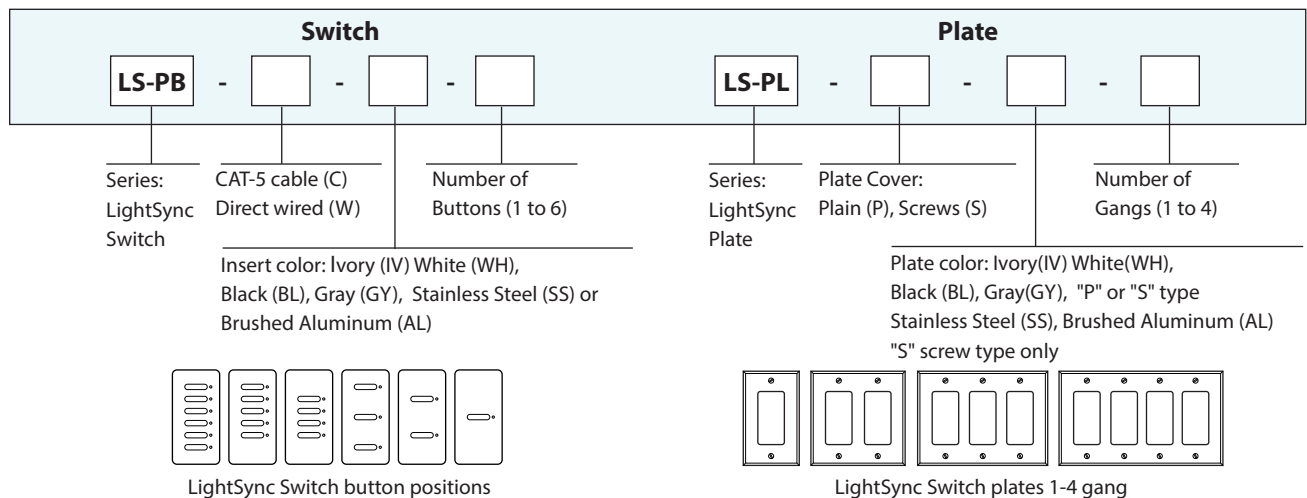

LightSync Digital

Classic Data Line Switch

Physical

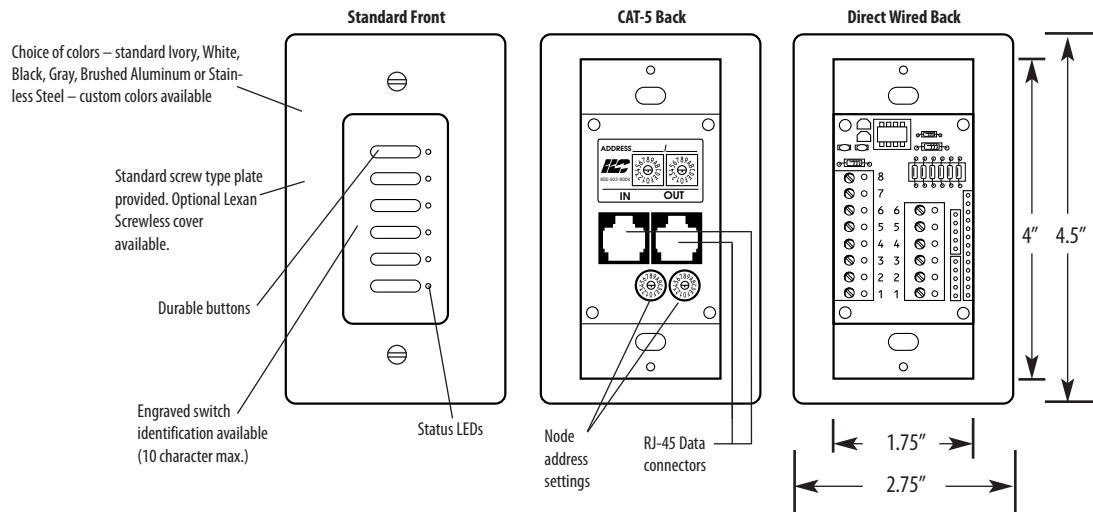

Specifications

Physical:

- Standard single gang mounting
- Digital addressing switches
- RJ45 connectors provided for easy connection
- Standard Screw plate or screwless plate available
- Mounting screws provided
- Laser engraving available, up to 10 characters
- Available in ivory, white, black, gray, stainless steel and brushed aluminum

Switch Plates:

- Brushed Aluminum (visible screws)
- Stainless Steel (visible screws)
- Painted (visible screws)
- Optional Lexan® Screwless

Electrical:

- Powered the from panel or LightSync network

Operating Environment:

- Location: Interior space
- Operating Temp.: 0° to 50° C
- Humidity: 10% - 90% Non-condensing
- Atmosphere: Non-explosive/corrosive
- Vibration: Stationary

Certifications and Approvals:

- UL
- FCC Part 15