intelligent
lighting controls
A Cooper Lighting Solutions business

LightSync Digital | Touch Button Switch

Overview

The LightSync Digital Touch Switch Station offers a durable switch that is resistant to impact and vandalism. Switch stations are available with 1 to 3 highly durable push button switches and have a status LED associated with each button. Each button may be programmed to control any relay(s), group(s) or preset(s) throughout the network. Switch Stations are available in four colors or stainless steel.
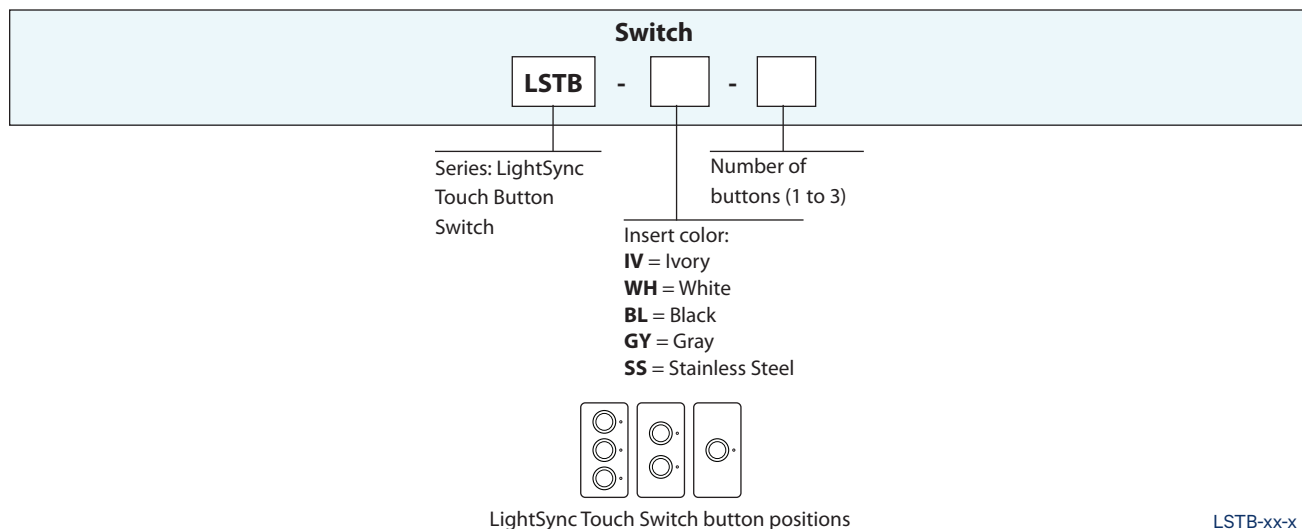
Plate not included

Features

- **Made in the USA**
- **Digital CAT-5 Ready**
- **Durable** vandal resistant data line switch station
- **Buttons** range from 1 to 3 per station
- **Programmable buttons** control any relay(s), group(s) or preset(s)
- **Status LEDs** for indicating the true state of a relay, group or preset

- **Switch Stations** are available in white, ivory, gray, black, stainless steel
- **Mounts** in a standard single gang box
- **Remote mount** anywhere on the LightSync network
- **Self powered** from the network
- **Addressable** rotary switches

Warranty

Five-year limited warranty

Ordering

Switch

LSTB - ☐ - ☐

Series: LightSync Touch Button Switch

Number of buttons (1 to 3)

Insert color:
IV = Ivory
WH = White
BL = Black
GY = Gray
SS = Stainless Steel

LightSync Touch Switch button positions

A **COOPER** Lighting Solutions business

intelligent
lighting controls
A **Cooper Lighting Solutions** business

www.ilc-usa.com
952.829.1900

LightSync Digital | Touch Button Switch

Physical

Standard Front (with plate)

4.5"

2.75"

Back

Node address settings

Intelligent Lighting Controls, Inc.
5229 Edina Industrial Blvd.
Minneapolis, MN 55439
1-800-922-8004
www.ilc-usa.com

ADDRESS

IN   OUT

4.125"

1.437"

RJ-45 Data connectors
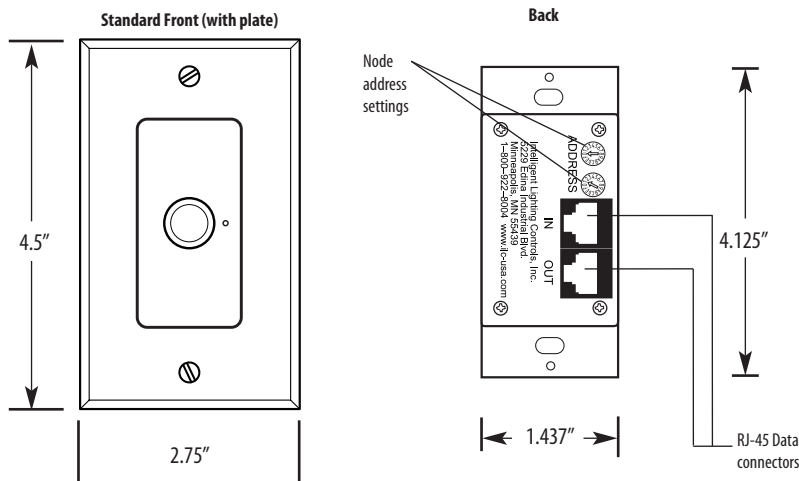
Specifications

Physical:
• Standard single gang mounting
• Digital addressing switches
• RJ45 connectors provided for easy connection
• Mounting screws provided
• Stainless Steel Switch

Electrical:
• Powered from the panel or LightSync network
• 200,000 electrical life cycles

Operating Environment:
• Location: Interior space
• Operating Temp.: 0° to 50° C
• Humidity: 10% - 90% Non-condensing
• Atmosphere: Non-explosive/corrosive
• Vibration: Stationary
• Switch Ingress Protection: IP68

Certifications and Approvals:
• FCC Part 15

LSTB-xx-x Rev.B