


LightLEEDer EVO Wireless Controller Product Details

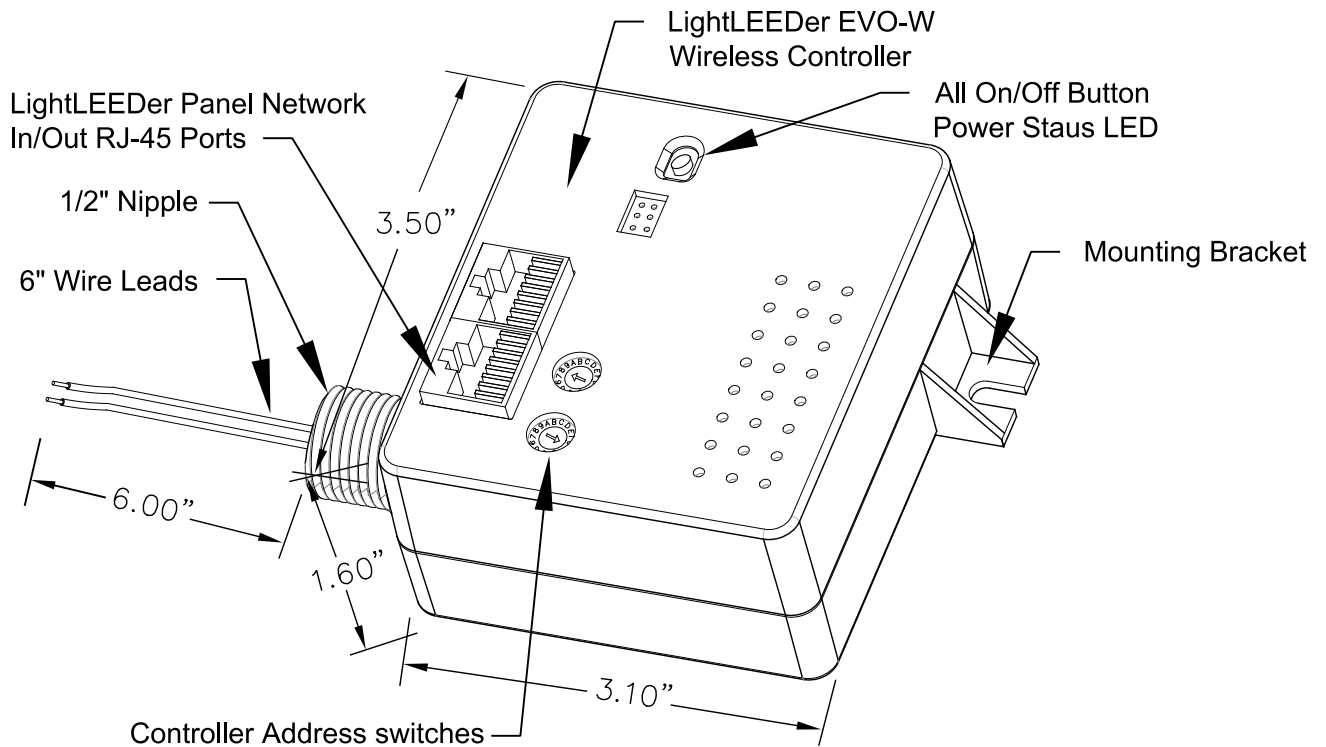

General Information:

- Mounts to junction box 1/2" knock out and secures to wall with mounting bracket
- All On/Off Button for all relays controlled by LLEVO-W
- LED status for Controller Power
- LightLEEDer Network In/Out RJ-45 Ports
- LLEVO-W addressing switches
- Wireless 915Mhz radio for linking up to 50 feet line of sight
- Bluetooth interface for ILC-Pro App
- Wireless radio for ILC-SWX wireless sensors

Physical:

- Enclosure 3.10" x 3.50" x 1.60"
- 6" Wire leads, color coded for easy wiring
- 1/2" nipple with conduit nut

Electrical:

- 120/277VAC @ .6 amps

Operating Environment:

Location: Interior
Operating Temp: 0-50 deg. C
Humidity: 10-90% Non-Condensing
Atmosphere: Non Explosive/Corrosive
Vibration: Stationary