


2R9C SPST 20 AMP 120/277/347 VAC Relay

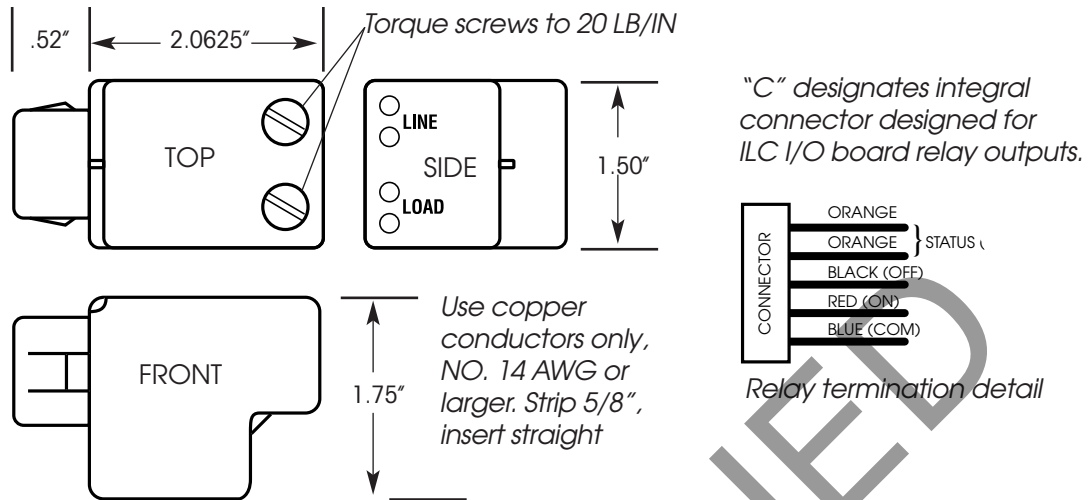

General Information

- UL Listed
- Mounts in standard 1/2" K.O. .825" - .875" diameter, 14 or 16 gauge material
- Operates in any position

Line Voltage Characteristics

- Contacts: SPST Maintained (permanent magnet latching)
- Terminals: 2 terminals, 2 back wiring holes per terminal feedthrough wiring
- Screw-actuated clamps for use with #14-10AWG solid or stranded copper wire only

Low Voltage Characteristics

- Split coil: 1/2 for "ON", 1/2 for "OFF"
- Compatible with standard interface drivers
- Operating voltage:
 - 18 - 30 VAC rectified
 - 12 - 24 VDC filtered
- Duty rating: Momentary
- Minimum activating pulse time: 17 milliseconds
- Coil impedance: 68 - 73 ohms at 60Hz, 50 - 60 ohms DC resistance
- Switching power required for each 2R relay is:
 - 2.2 VA per relay at 24 VAC rectified
 - 175 mA per relay at 12 VDC
 - 350 mA per relay at 24 VDC
- Status contacts: 1 amp AC/DC

Physical:

- Mounts in standard 1/2" K.O. .825" - .875"
- Operates in any position

Electrical:

- 120, 277 or 347 VAC
- Motor Loads
 - 1 Hp @ 120VAC
- SCCR Rating*: 18,000 Symmetrical Amperes
- 20 amp Ballast 120, 277 or 347 VAC
- Resistive loads: 20 amps 120, 277 or 347 VAC

Connectors:

- Leads available in plain wire (no connector), C connector (5-pin female connector), EZ connector (quick disconnect terminals for standard .187" x .020" male tabs)

Operating Environment:

- Location: Interior Space
- Operating Temperature: 0° to 60° C (32° to 140° F)
- Relative Humidity: 10% to 95%
- Atmosphere: Non-condensing, Non-explosive, Non-corrosive
- Vibration: Stationary application, NEMA Level A

Certifications:

- UL
- FCC Approval for commercial and residential use

* "Suitable for use on a circuit capable of delivering not more than 10,000 rms Symmetrical Amperes, 120 Volts maximum when protected by 50A maximum RK5 fuses or a 50A circuit breaker having an interrupting rating not less than 10,000 rms Symmetrical Amperes, 277 VAC maximum. Suitable for use on a circuit capable of delivering not more than 18,000 rms Symmetrical Amperes, 277 volts AC maximum, when protected by a 20A maximum RK5 fuse having an interruption rating not less than 18,000 rms Symmetrical Amperes, 277VAC maximum."



Energy Saving Lighting Controls

INTELLIGENT LIGHTING CONTROLS, INC.

5229 Edina Industrial Boulevard
Minneapolis, Minnesota 55439
Phone 952 829 1900
FAX 952 829 1901
www.ilc-usa.com

PD0202_revC