


R20D-EM and WR20D-EM Bypass Relay Product Details

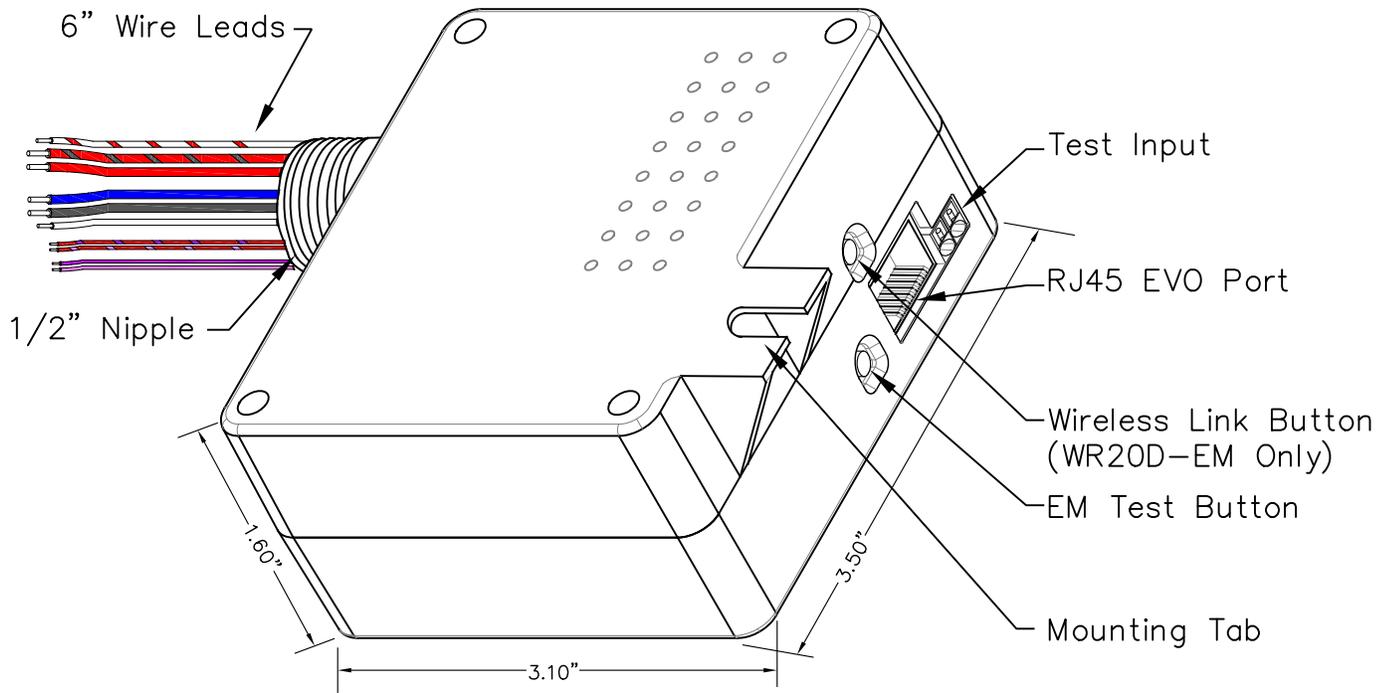

General Information:

- Mounts to junction box 1/2" KO and secures to wall with mounting tab
- CAT-5 connection to LLEVO panel relay control
- EM Test Button for forcing device into EM mode
- Wireless Link Button for WR20D-EM device with ILC wireless control
- Remote Test Input for EM, fire, and security interface: two wire non polarized 10-28VDC/VAC at 10mA maximum.

Electrical

2-Load Independent Emergency and Normal power control with Dimming
16Amps, 120/277 VAC LED/Electronic
20Amps, 120/277 VAC Tungsten
1/4HP @ 120VAC Motor Load
100mA Sink for 0-10V Dimming
600VAC rated dimming leads
UL924 EM and UL916 Normal load rated

Operating Environment

Location: Interior
Operating Temp: 0-50 deg. C
Humidity: 10-90% Non-Condensing
Atmosphere: Non Explosive/Corrosive
Vibration: Stationary
Plenum Rated