


24 VAC Control Transformer (120/347 VAC)

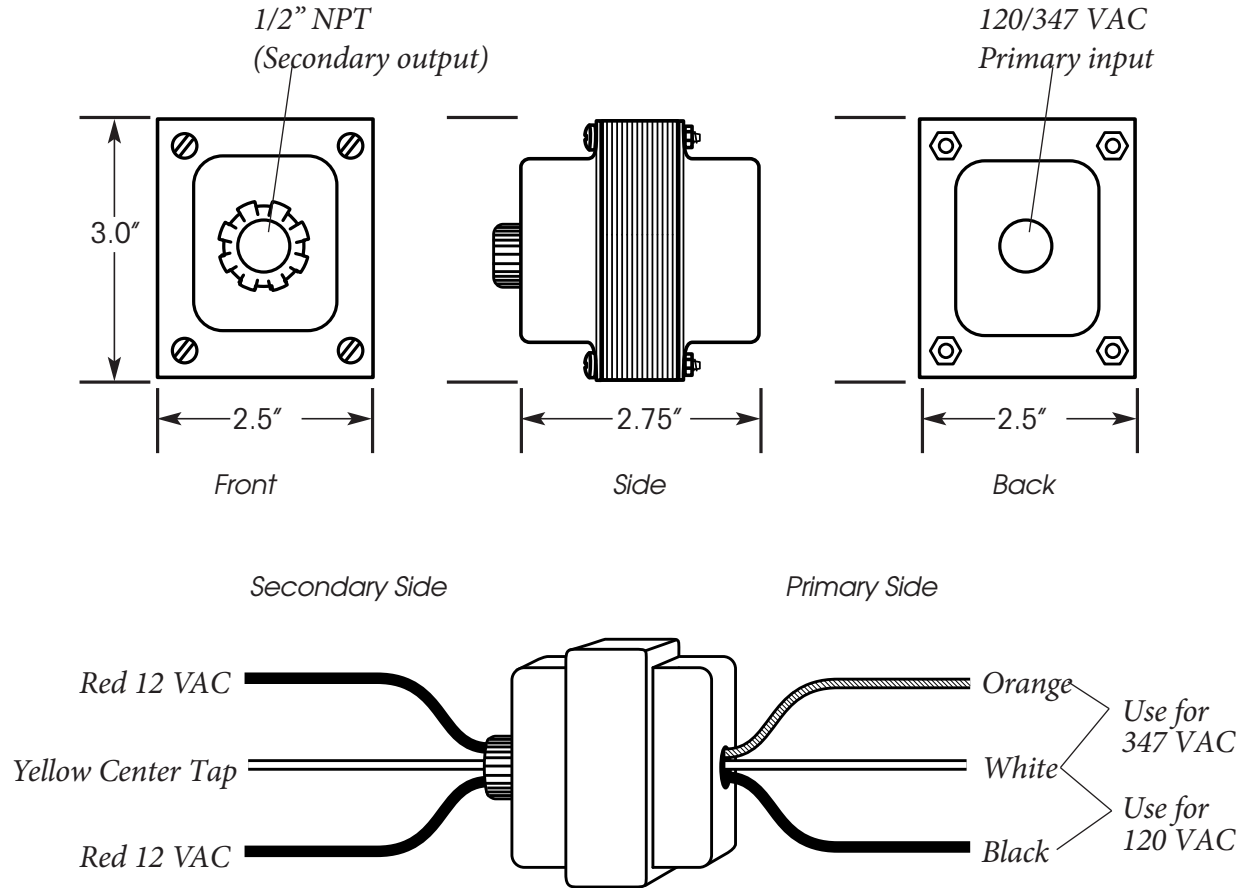

General Information

- Multi-tap transformer designed for ILC lighting controls
- Model 1186-1002
- 120 or 347 VAC primary
- 24 VAC secondary with center tap
- Color coded wires
- Internal resettable circuit protection on secondary side
- Operates in any position
- Class 2 Not Wet
- Class 3 Wet
- UL recognized (UL 1585)

Line Voltage Characteristics

- Primary: 120 or 347 VAC, 60HZ
- Secondary: 24 VAC, 40 VA

Physical:

- Operates in any position

Electrical:

- 120 or 347 VAC input
- 24 VAC output

Operating Environment:

- Location Interior Space
- Operating Temperature 0° to 60° C (32° to 140° F)
- Relative Humidity 10% to 95%
- Atmosphere Non-condensing, Non-explosive, Non-corrosive
- Vibration Stationary application NEMA Level A

Certifications:

- UL