

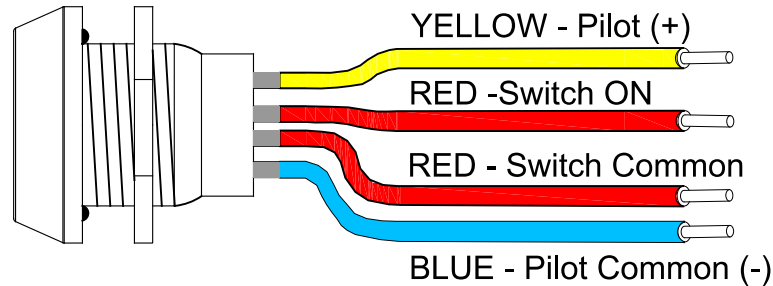


Wet Location Touch Button 19mm, 27mm Details





WTB Push Button Switch with LED Status Ring
Momentary closure, IP65 rated with silicone rubber O-ring

WTB 19mm

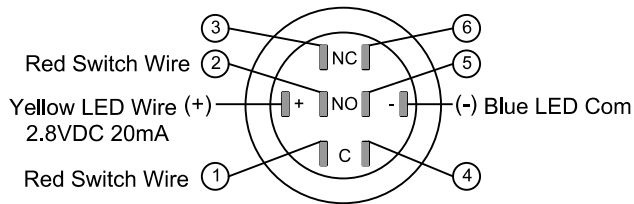

WTB 27mm

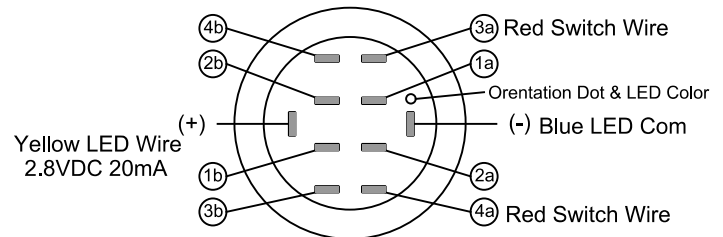

The Wet Location Touch Button hardware assembly will come with 1, 2 or 3 push buttons in a single gang stainless steel faceplate with Neoprene gasket. Weatherproof wirenuts provided for extending the wire from wet location installation to the control inputs installed in a dry location.

1st Red wire terminates to the switch common terminal.
2nd Red wire terminates to the switch input terminal.
Yellow LED Pilot wire (+) terminates to the status pilot terminal.
Blue LED Pilot wire (-) terminates to the status pilot common terminal
The LED operates at 2.8VDC, 20mA and is not supplied with limiting resistor. LED pilot circuits at 24VDC require a 10K Ohm resistor in series.