


# LightSync™ Data Line Slide Switch

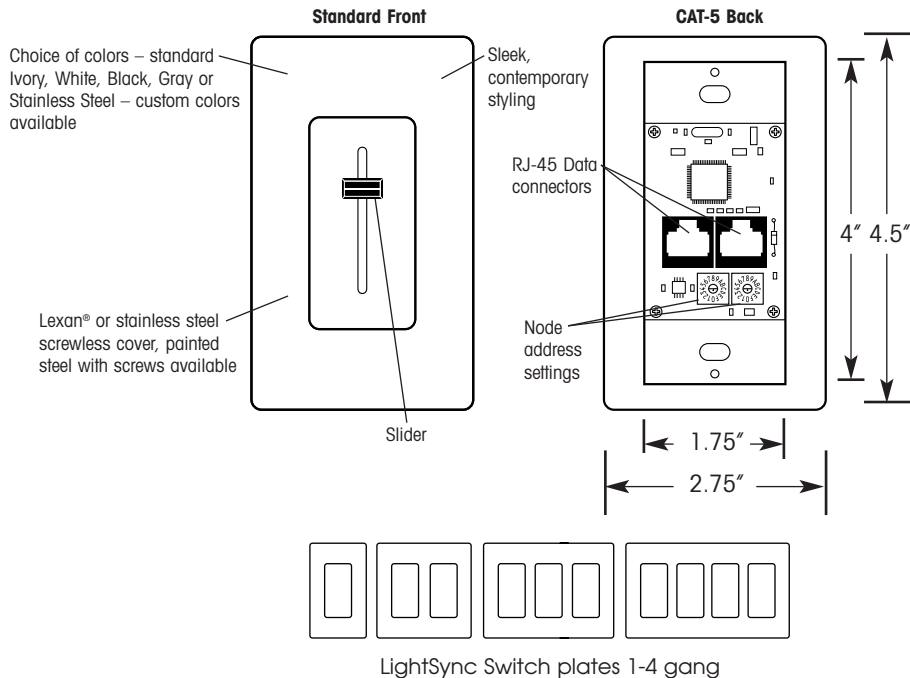

## General Information

- Mounts in standard wall boxes
- Matching screwless wall plate
- Program LightSync Slide Switch to any LM-4 Dimmer Output Module(s) or to control relays
- RJ-45 connectors for standard CAT-5 cable
- Add LightSync Slide switches anywhere along the data cable
- Operates in any position
- UL and FCC approved

## Characteristics

- Single slide switch
- Termination: RJ-45 connectors for standard CAT-5 cable
- Set node address on back of switch
- Standard Lexan® plastic switch plates available in four colors and stainless steel (painted steel with visible screws optional)
- Switches are digitally addressable on LightSync data line
- CAT-5 capability eliminates the need for "home run" wiring
- FCC and UL approved for commercial/industrial applications
- One year warranty

## Physical:

- Plate material:
  - Lexan®
  - Painted steel/visible screws
- Mounts in standard one gang box spacing
- Mounting screws provided
- Switch colors:
  - Ivory, White, Black, Gray

## Electrical:

- Powered from LightSync data line

## Operating Environment:

- Location Interior space
- Operating Temperature 0° to 50° C (32° to 112° F)
- Relative Humidity 10% to 95%
- Atmosphere Non-condensing, Non-explosive, Non-corrosive
- Vibration Stationary application, NEMA Level A