


# LightSync Input Module Details

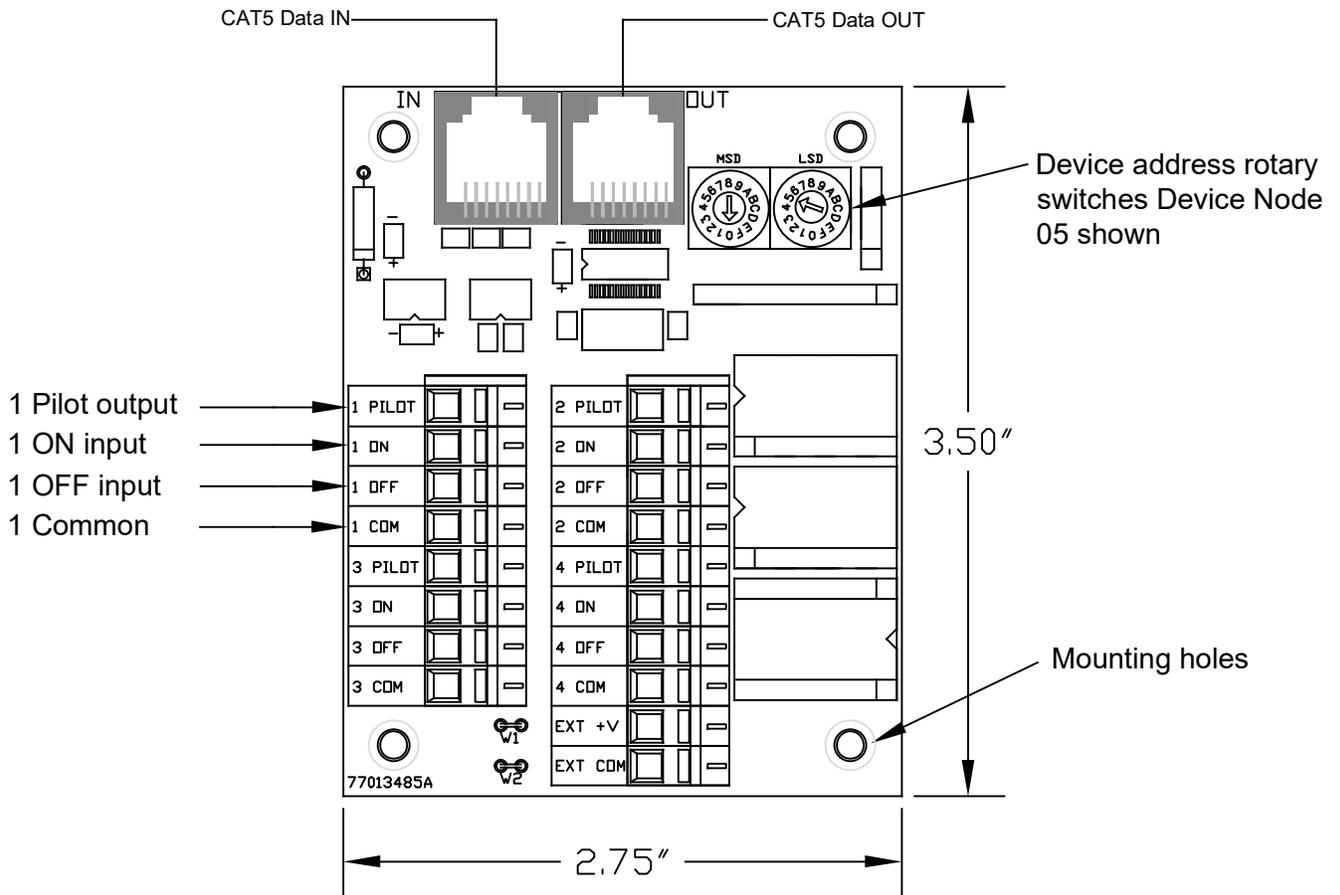

## General Information:

- The LightSync Input Module has 4 independent inputs.
- Each input accepts 2 or 3 wire closures.
- Accepts momentary or maintained dry contact signals.
- Connector accept 28 to 14AWG wire.
- Input ratings: 23mA@14-15VDC
- Associated LED status pilot outputs for each input.
- Current limiting resistors for LED are not required.
- LED output ratings: 3.5mA@2VDC

## Operating Environment:

- Location: Interior
- Operating Temp: 0 - 50 deg. C
- Humidity: 10% - 100% Non-Condensing
- Atmosphere: Non-explosive/corrosive
- Vibration: Stationary