


# LightSync Photo Sensor Controller Details

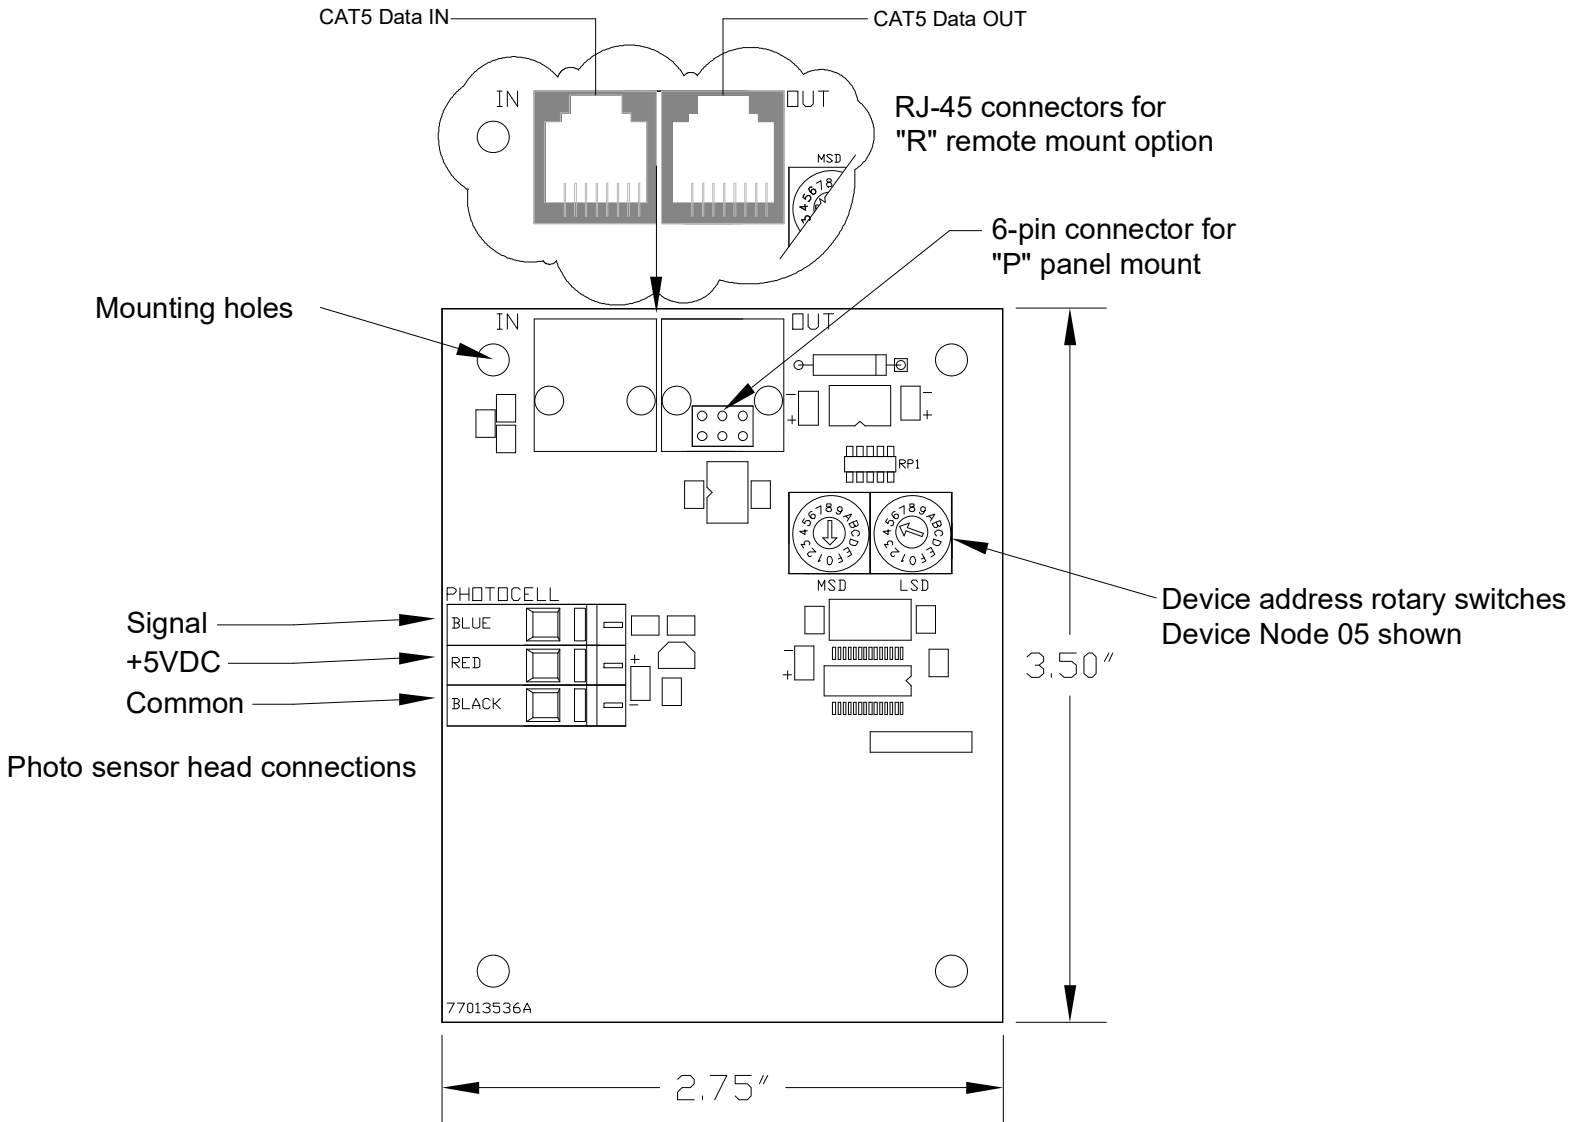

## General Information:

- Monitors light levels from 0 - 1800fc in 256 steps.
- Accepts a digital signal from the photo sensor head.
- Powered from the LightSync data line.
- Panel or remote mounting options.
- Panel mount directly connects to relay driver board.
- Accepts 1 indoor or outdoor photo sensor head.
- Push-to-connect sensor input accepts 28 to 14AWG wire.
- Has 8 independent set point inputs.
- Adjustable photo sensor filter time.

## Operating Environment:

Location: Interior  
 Operating Temp: 0 - 50 deg. C  
 Humidity: 10% - 100% Non-Condensing  
 Atmosphere: Non-explosive/corrosive  
 Vibration: Stationary