


LightSync Power Supply Repeater 4 Product Details

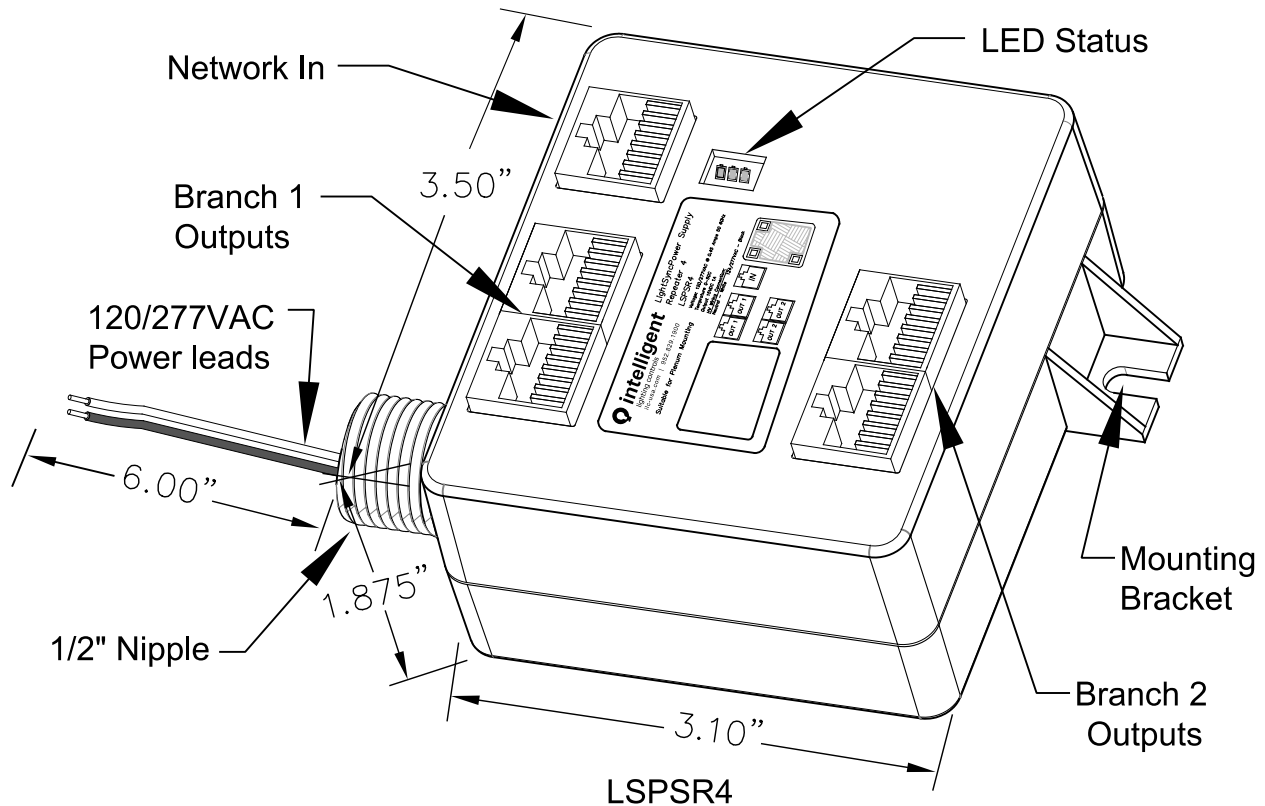

General Information:

- Mounts to junction box 1/2" knock out or wireway
- Mounting bracket for securing to wall
- Network RJ-45 Input port for connection from LL Panel network of local LS output from a panel or LLEVO for local LS switch support
- Branch 1 Output pair from power supply and data repeater 1
- Branch 2 Output pair from power supply and data repeater 2
- LED status of power, data transmit and receive TX/RX
- 6" Wire leads for Line voltage 120/277VAC

Electrical:

- 120/277 VAC power supply
- 0.45Amps at 120 VAC
- 1Amp 15VDC output for LS devices

Operating Environment:

- Location: Interior
- Operating Temp: 0-50 deg. C
- Humidity: 10-90% Non-Condensing
- Atmosphere: Non Explosive/Corrosive
- Vibration: Stationary