


# LightSync Power Supply Repeater 6 Product Details

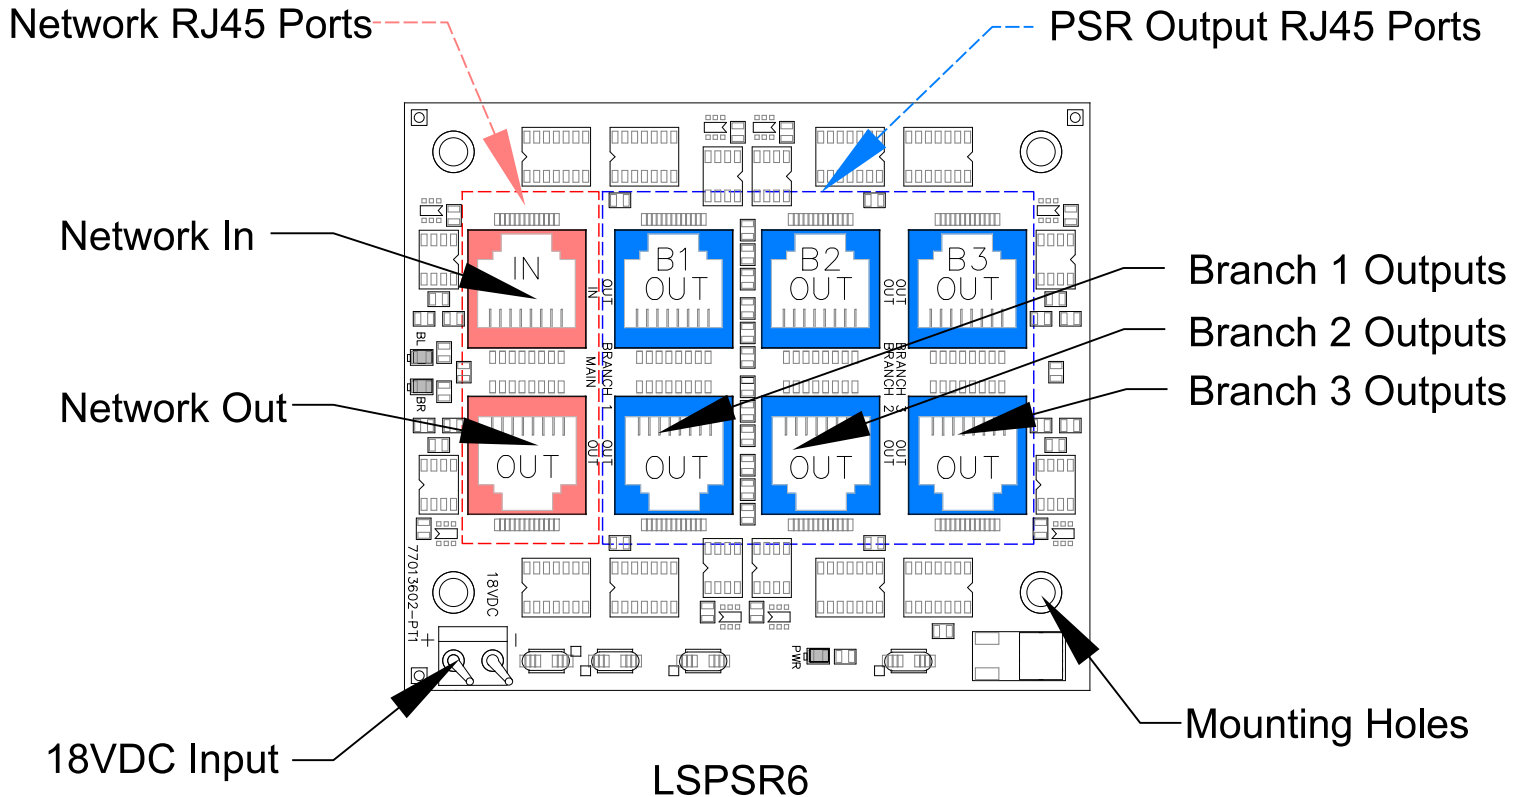

- Network In and Out ports provide a pass-through data connection coming from the LLNC or panel network with a non-repeated output for continuing the network to additional LSPSR modules or panels.
- 18VDC plug-on terminal for connection from PNL-20-18 power supply.
- Branch outputs provide two RJ-45 ports per branch for running out to LightLEEDer panels or LightSync devices in the network.
- 4 mounting holes for remote or panel installation.
- Refer to TB1408 for cumulative distance power calculations.