


Photo Sensor Head Details

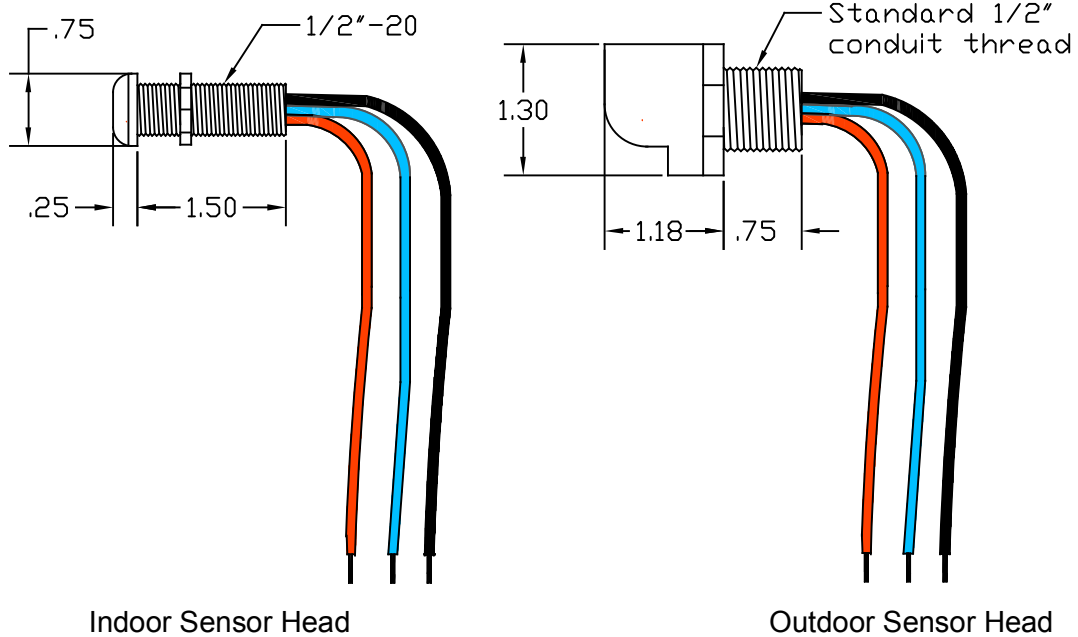

Indoor Sensor Head

Outdoor Sensor Head

Indoor Photocell Sensor Head:

- Designed to mount in a ceiling tile, sheet rock, or directly in a lighting fixture
- White PVC material
- Head 0.75" x 0.25", 1/4"-20 x 1.50" threaded mount
- 6" wire leads, 22 AWG
- Analog photocell to digital output

Outdoor Photocell Sensor Head:

- Provided with a standard 1/2" conduit thread for mounting on an LB type fitting or junction box
- White PVC material
- Head 1.3" x 1.18", 1/2" conduit thread x .75
- 6" wire leads, 22 AWG
- Analog photocell to digital output

Connections:

- Red: 5VDC positive
- Black: 5VDC common
- Blue: Digital signal

Operating Environment:

- Location: Interior/Exterior space
- Operating Temp: -35 to 50 deg. C
- Humidity: 10% to 100% Condensing
- Atmosphere: Non-explosive/corrosive
- Vibration: Stationary