Catalog Number: Date: Project:



www.ilc-usa.com 952.829.1900

**EVO Lite** 

**G3 Switch** 





### **Overview**

The EVO Lite G3 Switch is a cost effective, versatile and easy to use hardwired over Cat-5 device. 1 or 2 Zone control with Press-and-Hold Ramp-Up/Ramp-Down dimming from the EVO Lite Power Pack.





# Colors available WH IV GY LA BK RD White Ivory Gray Light Black Red Almond

\*wall plate cover not included


## **Features**

- Made in the USA, meets BABA Requirements
- · No Field configuring required
- Available in same colors as G3 switches
- Color change kits available
- RJ-45 ports for hardwire CAT-5 connection to EVO Lite Power Pack
- MZD capable 2-Zone dimming
- Matches LightSync G3 switches
- ILC blue rear cover
- Powered from EVO Lite Power Pack
- · Low voltage for quick and easy installation

# Warranty

Five-Year limited warranty

# **Ordering**

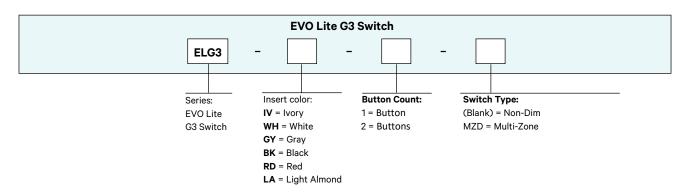

All ILC product configurations are built to be compliant with the Buy American Act of 1933 (BAA) or the Buy America Build America Act (BABA). BABA is the minimum Government compliance requirement for the Buy America Build America standards which is part of the Infrastructure and Investment Jobs Act (IIJA). Individual Government Agencies may have more stringent compliance standards. Please refer to the <u>DOMESTIC PREFERENCES</u> website or consult the CLS Domestic Preferences team for more information. Components shipped separately may be separately analyzed under domestic preference requirements.







www.ilc-usa.com 952.829.1900


**EVO Lite Digital** 

**G3 Switch** 

# **Physical**







# **Specifications**

- Recommended for single-gang switch box mounting only (Not compatible with multi-gang, round-cornered mud rings)
- Hardwire over CAT-5, no addressing required
- RJ45 connectors provided for easy connection
- · Mounting screws provided
- · Laser engraving standard as shown, Black and Red buttons are pad-printed
- · Custom engraving available
- 1.75" W x 4.18" H x 0.875"D

### **Electrical:**

- Powered from EVO Lite Power Pack
- Low voltage

### **Operating Environment:**

- · Location: Interior space
- Operating Temp.: 0° to 50° C
- Humidity: 10% 90% Non-condensing
- Atmosphere: Non-explosive/corrosive
- · Vibration: Stationary

### **Domestic Preferences:**

0.68"

0.78"

Domestic preference options to meet BAA or BABA requirements. BABA is the minimum Government compliance requirement for the Buy America Build America standards which is part of the Infrastructure and Investment Jobs Act (IIJA). Individual Government Agencies may have more stringent compliance standards. Please refer to the **DOMESTIC PREFERENCES** website or consult the CLS Domestic Preferences team for more information. Components shipped separately may be separately analyzed under domestic preference requirements.

### **Certifications and Approvals:**

• FCC Part 15

See Technical Bulletin TB0620 for switch plate compatibility.

Catalog Number: Date: Project:




www.ilc-usa.com 952.829.1900

**EVO Lite Digital** 

G3 Switch

# **EVO Lite System**

This diagram shows the the main components and topology of the Intelligent Lighting Controls EVO Lite system. The EVO Lite devices use CAT5 cable for device to device communications. See EVO Lite design guide for typical wiring data.

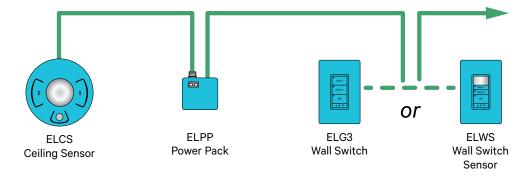



Cooper Lighting Solutions

1121 Highway 74 South Peachtree City, GA 30269

www.cooperlighting.com