Catalog Number:	Date:	Project:

intelligent lighting controls

www.ilc-usa.com
952.829.1900

LightSync | **Ceiling Occupancy Sensor**

Overview

The LightSync Digital Occupancy Sensor is a low profile ceiling mount sensor designed to install in a standard commercial ceiling. The sensor is provided with dual-tech operation with passive infrared and overlapping passive acoustic sensing. Configured over the LightSync digital bus for easy set-up and adjustment, this sensor supports occupancy and vacancy in a single device. The occupancy sensor also has a full range photo sensor supporting open loop or closed loop daylight dimming. The LS digital occupancy sensor uses the newest digital components and detection techniques for superior performance. Sensors detect occupant movement as they move through the field of view via passive infrared technology. Acoustic technology enables enhanced detection once the lighting is turned on.



Features

- **Made in the USA, meets BABA Requirements**
- Low profile ceiling mount duel-tech occupancy and vacancy sensor
- Field configurable for PIR or acoustic sensing operation
- Sensitivity adjustments for passive infrared and acoustic can be independently adjusted to three different levels
- Automatic Gain Control filters background noise to fine tune acoustic sensitivity
- Field configured setting for “no touch” adjustment are all done from the ILC LightLEEDer Pro software
- Dual tech operation is triggered by PIR and uses the acoustic for holding a On state
- Cat-5 ready digitally addressable device
- LED indicators and acoustic sensing can be independently disabled
- Connects directly to a LightLEEDer panel or LLEVO local bus as a LightSync digital device for power and communication, no external power pack required
- Panel level configuration for relay on/off and dimmer control to the local panel or over the ILC network
- Provides control for Relays, Presets, Groups, and Scenes
- Built in selectable photo sensor for full range continuous daylight dimming control
- Auxiliary Relay output for connection to BAS system or Plug-load power pack
- **Black Color Change Kit available as an accessory purchase (LSCS-CCK-B)**

Warranty

Five-Year limited warranty

Ordering

LightSync Occupancy Sensor

LSCS	--		AR

Series: LightSync Ceiling Sensor

06 = ~600 sq. ft.
20 = ~2,000 sq. ft.

AR = Auxiliary Relay

*Black Color Change Kit available

All ILC product configurations are built to be compliant with the Buy American Act of 1933 (BAA) or the Buy America Build America Act (BABA). BABA is the minimum Government compliance requirement for the Buy America Build America standards which is part of the Infrastructure and Investment Jobs Act (IIJA). Individual Government Agencies may have more stringent compliance standards. Please refer to the DOMESTIC PREFERENCES website or consult the CLS Domestic Preferences team for more information. Components shipped separately may be separately analyzed under domestic preference requirements.

Catalog Number: | Date: | Project:


intelligent lighting controls

www.ilc-usa.com
952.829.1900


LightSync Digital | **Ceiling Occupancy Sensor**

Physical


Top View




Side View




Junction Box Mounting Plate







Designed to be installed into ceiling tile with spring clips or onto junction box with trim ring cover

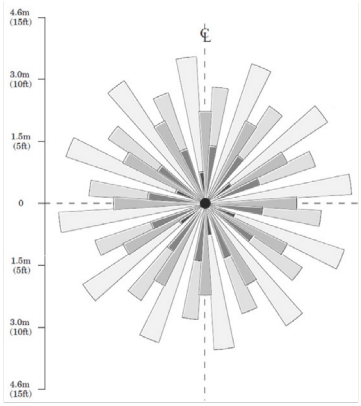


Small Motion up to ~600 sq. ft.

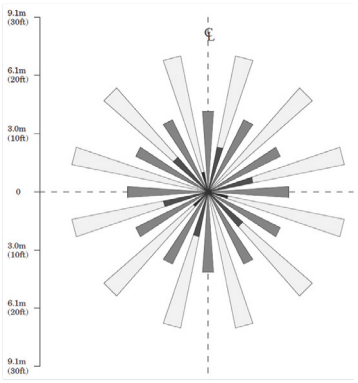

Large Motion up to ~2,000 sq. ft.

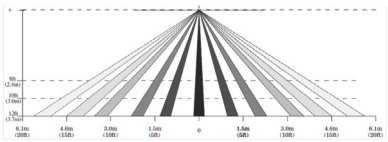



8 feet to 15 feet mounting height recommended for small and large motion lenses, coverage pattern pending validation

Specifications

Physical:

- 3.6"W x 3.6H x 1.4D (91mm x 91mm x 36mm)
- Low profile recessed ceiling mounting
- Spring retention clips for mounting in 3" hole
- Junction box mounted plate and trim ring provided
- RJ-45 In/Out ports
- Digital addressing switches
- 2-Wire #20AWG leads for auxiliary relay output

Operation:

- Selectable PIR or Dual Tech operation from the LightLEEDer panel or LightLEEDer Pro software
- Time Delay is set from LightLEEDer panel software
- Photo sensor for daylight dimming control configured from LightLEEDer software
- An initial PIR event is required to enable acoustic functionality
- Acoustic sensing overlaps and enhances/extends overall detection and time delay
- Automatic gain control filters ambient noise
- Sensor will re-trigger with acoustic only after an initial 5 minute time-out before a PIR trigger is required to restart the cycle
- Daylight Harvesting photocell sensor can be enabled for true full-range control with 0-255 step resolution in the 0 to 1,800 fc range
- Supports all standard ILC photocell sensor control options
- Auxiliary relay for BAS or plug-load power pack operation

Electrical:

- Powered from the ILC LightSync bus
- Auxiliary relay supports a 2Amp, 30VDC, NO or NC contact output

Operating Environment:

- Location: Interior space
- Operating Temp: 0° to 40° C (32°F to 104°F)
- Humidity: 10% - 90% Non-condensing
- Atmosphere: Non-explosive/corrosive
- Vibration: Stationary

Domestic Preferences:

Domestic preference options to meet BAA or BABA requirements. BABA is the minimum Government compliance requirement for the Buy America Build America standards which is part of the Infrastructure and Investment Jobs Act (IIJA). Individual Government Agencies may have more stringent compliance standards. Please refer to the DOMESTIC PREFERENCES website or consult the CLS Domestic Preferences team for more information. Components shipped separately may be separately analyzed under domestic preference requirements.

Certifications and Approvals:

- Class 2 inputs
- FCC Part 15
- Meets local energy codes

www.ilc-usa.com © 2024 Intelligent Lighting Controls