



Overview

The LightSync Digital Touch Switch Station offers a durable switch that is resistant to impact and vandalism. Switch stations are available with 1 to 3 highly durable push button switches and have a status LED associated with each button. Each button may be programmed to control any relay(s), group(s) or preset(s) throughout the network. Switch Stations are available in stainless steel.



Plate not included



Features

- **Made in the USA, meets BABA Requirements**
- **Digital CAT-5 Ready**
- **Durable** vandal resistant data line switch station
- **Buttons** range from 1 to 3 per station
- **Programmable buttons** control any relay(s), group(s) or preset(s)
- **Status LEDs** for indicating the true state of a relay, group or preset
- **Switch Stations** are available in stainless steel
- **Mounts** in a standard single gang box
- **Remote mount** anywhere on the LightSync network
- **Self powered** from the network
- **Addressable** rotary switches

Warranty

Five-Year limited warranty

Ordering

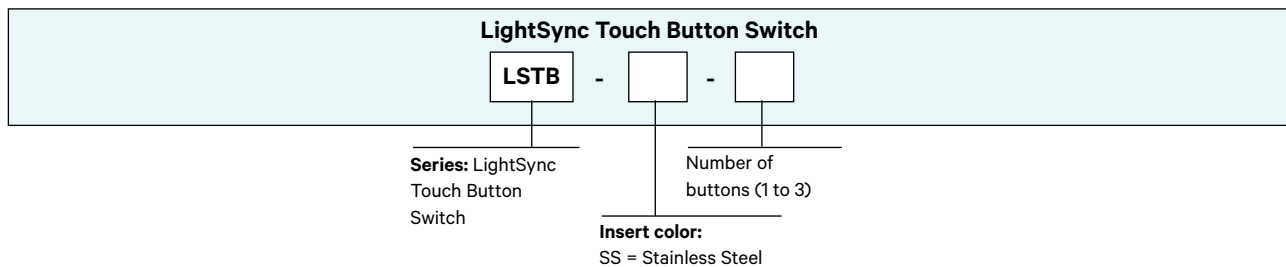


LightSync Touch Switch button positions

All ILC product configurations are built to be compliant with the Buy American Act of 1933 (BAA) or the Buy America Build America Act (BABA). BABA is the minimum Government compliance requirement for the Buy America Build America standards which is part of the Infrastructure and Investment Jobs Act (IIJA). Individual Government Agencies may have more stringent compliance standards. Please refer to the [DOMESTIC PREFERENCES](#) website or consult the CLS Domestic Preferences team for more information. Components shipped separately may be separately analyzed under domestic preference requirements.

LightSync Digital

Touch Button Switch

Physical

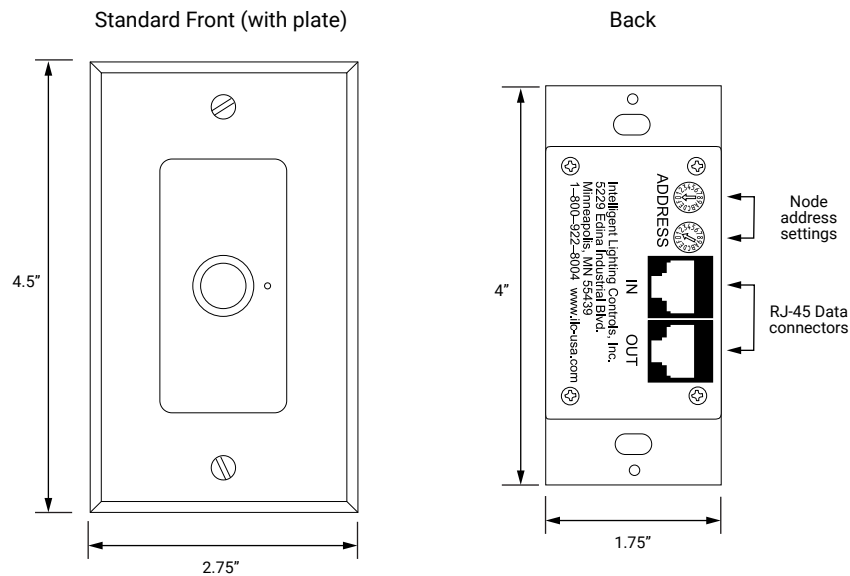

Specifications

Physical:

- Standard single gang mounting
- Digital addressing switches
- RJ45 connectors provided for easy connection
- Mounting screws provided
- Stainless Steel Switch

Electrical:

- Powered from the panel or LightSync network
- 200,000 electrical life cycles

Operating Environment:

- Location: Interior space
- Operating Temp.: 0° to 50° C
- Humidity: 10% - 90% Non-condensing
- Atmosphere: Non-explosive/corrosive
- Vibration: Stationary
- Switch Ingress Protection: IP68

Domestic Preferences:

Domestic preference options to meet BAA or BABA requirements. BABA is the minimum Government compliance requirement for the Buy America Build America standards which is part of the Infrastructure and Investment Jobs Act (IIJA). Individual Government Agencies may have more stringent compliance standards. Please refer to the [DOMESTIC PREFERENCES](#) website or consult the CLS Domestic Preferences team for more information. Components shipped separately may be separately analyzed under domestic preference requirements.

Certifications and Approvals:

- FCC Part 15