


Overview

The LightLEEDer Modem Module can be added to any LightLEEDer panel to provide a connection over an analog phone line. With this module and the LightLEEDer Pro software, you have the ability to monitor, program, backup and control the lighting controller. Programming can remotely be uploaded/downloaded from a single panel or a network of panels.

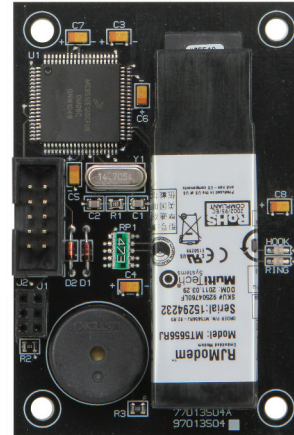


Features

- **Made in the USA**
- **Programming** can remotely be uploaded/downloaded
- **Direct control** of any relay output
- **True status** of relays or inputs in the lighting panel
- **Time-based** settings can easily be modified remotely
- **Installs directly** into any panel
- **Connection speeds** up to 56K Baud

Warranty

Six-year limited warranty


Ordering

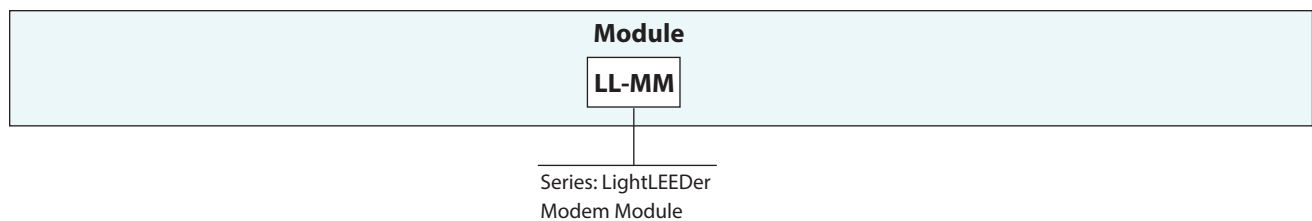

LightLEEDer

Modem Module

Physical

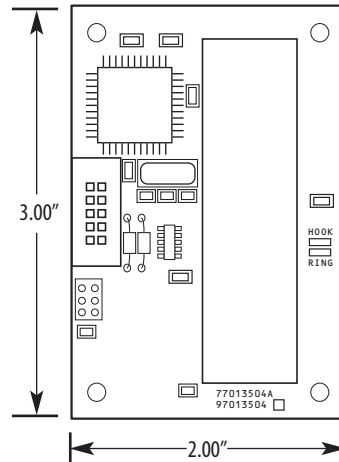

Specifications

Physical:

- 2.00" Wide X 3.00" High
- RJ11 connectors for analog phone line communications
- Audible sounder

Electrical:

- Powered from the controller

Operating Environment:

- Location: Interior space
- Operating Temp.: 0° to 50° C
- Humidity: 10% - 90% Non-condensing
- Atmosphere: Non-explosive/corrosive
- Vibration: Stationary

Certifications and Approvals:

- UL60950-1
- FCC Part 15 Class B
- FCC Part 68