


# Apprentice 3 Input and Relay Board Installation Details

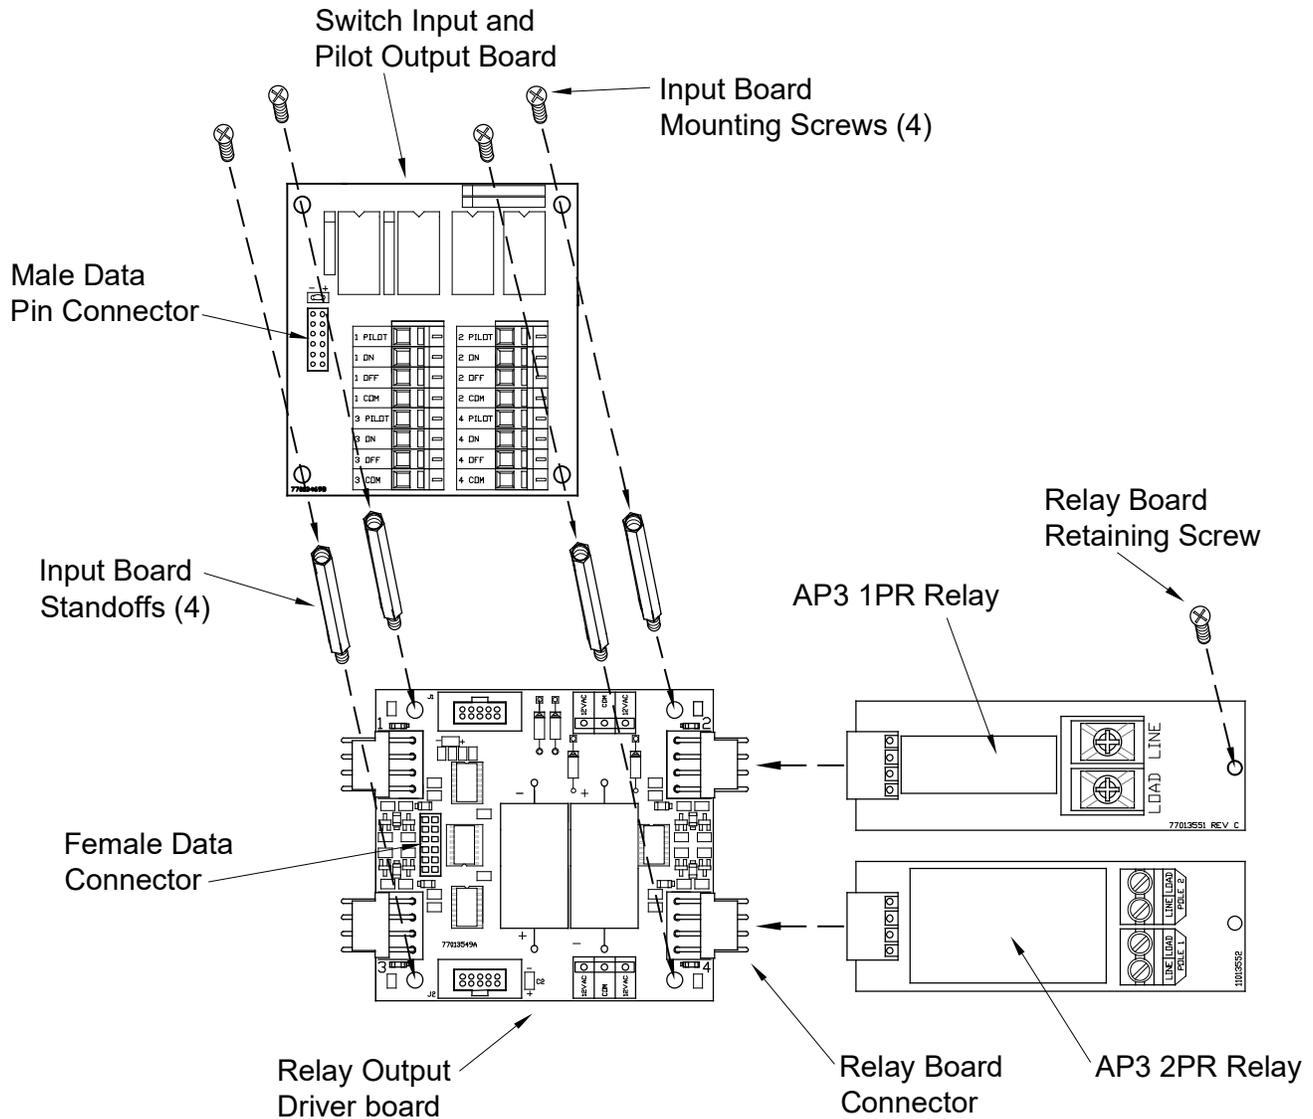

## Input Board Instructions:

1. Remove the four mounting screws that secure the relay output board.
2. Install the four standoffs provided in place of the mounting screws.
3. Align the male data pin connector on the input board to the female connector on the relay output board and insert.
4. Replace the four mounting screws removed from step 1

## Relay Board Instructions:

1. Power down the circuits in the panel.
2. Remove fishpaper barrier(s). \*
3. Remove the line and load wires.
4. Remove the relay board retaining screw.
5. Pull the relay board from the connector on the relay output board.
6. Reverse instructions to install replacement relay.

\* Note: The High Voltage Barriers in the panel need to be replaced with the installation of the 2PR (2-pole) relay. Order part number 78001567 for the 4 size panel barrier or 78001568 for the 8, 16, 24 and 32 size panel barrier.