


LightMaster Add-on Board Installation

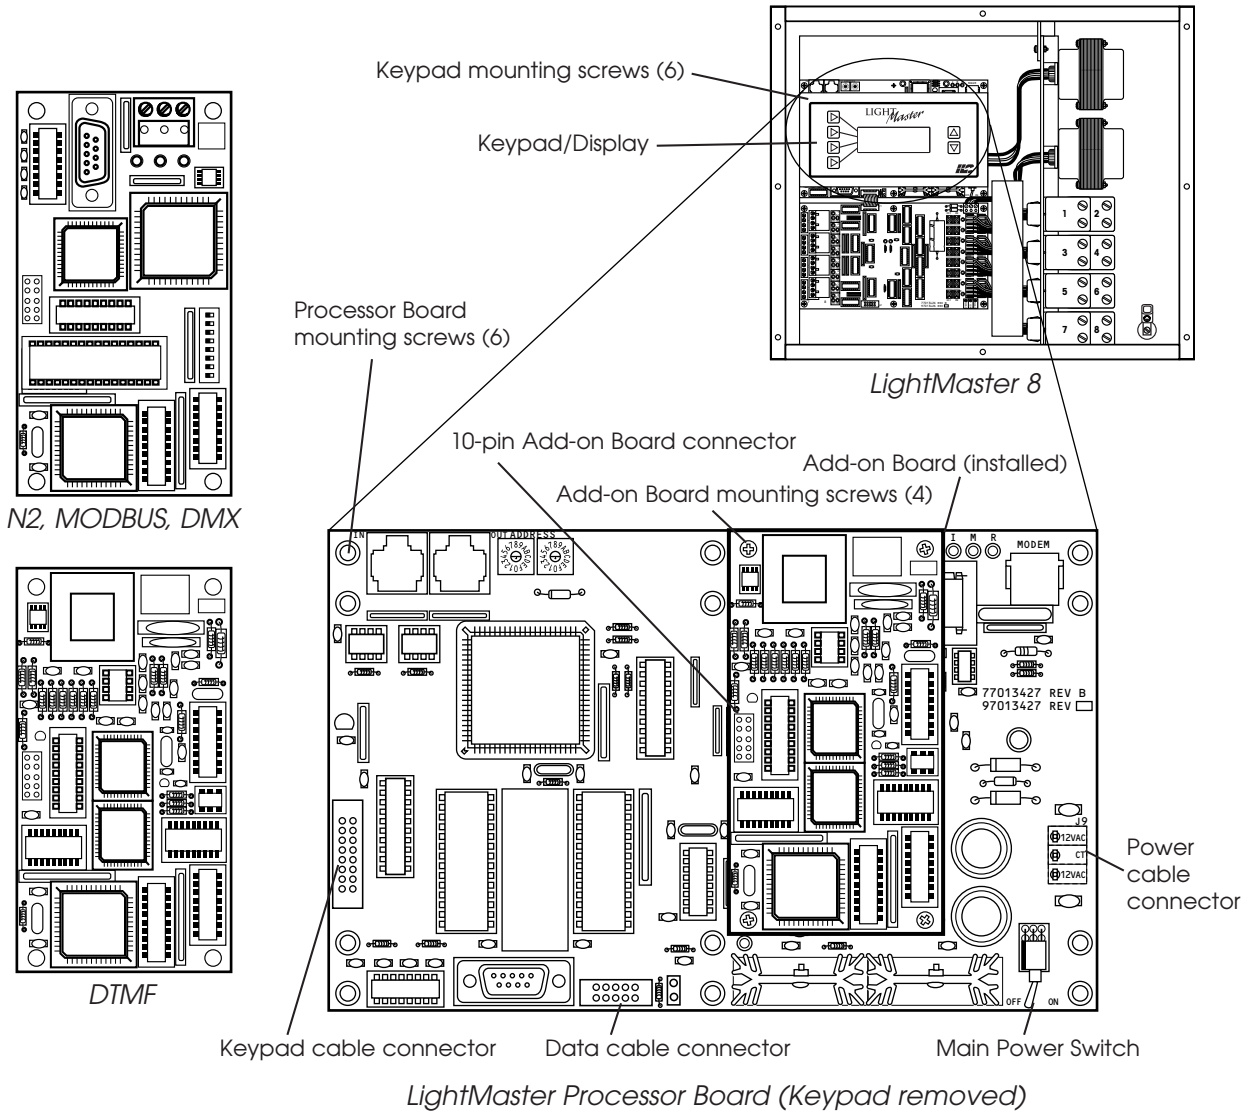

Installation (applies to all Add-on boards)

1. Turn the Main Power Switch OFF on the LightMaster processor board.
2. Remove 6 screws and standoffs holding the Keypad in place.
3. Lift the Keypad up and disconnect the keypad ribbon cable from its connector. Set aside.
4. Disconnect the power and data cables from the processor board. Remove the 6 mounting screws and remove board.
5. Install the 10-pin connector on the add-on board to the connector mounted on the processor board.
6. Install the four add-on board mounting screws and standoffs.
7. Install the processor board, keypad and cables in reverse order.
8. Power up the controller and verify the installation.